FURY PLUS

WIRELESS GAMING MOUSE

ARDOR GAMING

Contents

Intended Use 3
Safety Precautions 3
Rechargeable Battery Guidelines (Li-pol/Li-ion) 4
Specifications 7
Package Contents 7
Device Diagram 8
Getting Started 9
Connecting the Mouse 9
Software 10
DPI Settings and Indication 11
Polling Rate 11
Changing Backlight Modes 11
Charging 12
Replacing the Side Grip Pads 12
Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal 13
Warranty Information 14
Additional Information 14

Wireless Mouse ARDOR GAMING Fury Plus
User Manual

Dear Customer,

Thank you for your trust!

Our team fully shares your passion for gaming, which is why we put every effort into making your experience with our gaming accessories unforgettable. We wish you many new victories and the brightest impressions ahead!

Intended Use

The mouse is a device for controlling the cursor and issuing various commands to the computer.

Safety Precautions


- Do not make any modifications to the device design.
- To prevent short circuits, keep the device away from liquids and do not place open containers filled with liquids near it.
- Do not expose the device to electromagnetic radiation.
- The device is not intended for commercial use.
- The device is not intended for use by children or persons with reduced physical, sensory, or mental capabilities unless they are supervised by a person responsible for their safety. Do not allow children to play with the device.

Rechargeable Battery Guidelines (Li-pol/Li-ion)

Dear Customer, please note that this device uses a lithium-based rechargeable battery as its power source. Please carefully read the information below to help extend the life of your battery and prevent undesirable consequences during its operation.

Battery Capacity and Charge-Discharge Cycles

During prolonged storage and use, the rechargeable battery (hereinafter referred to as «the battery») tends to lose its charge and capacity. After 300 charge-discharge cycles (approximately one year of device use), the battery capacity may decrease to 80% of its nominal value. After 400 charge-discharge cycles, the battery capacity may decrease to 60% of its nominal capacity. Partial capacity reduction within these limits and time frames is natural battery wear and is not considered a defect.

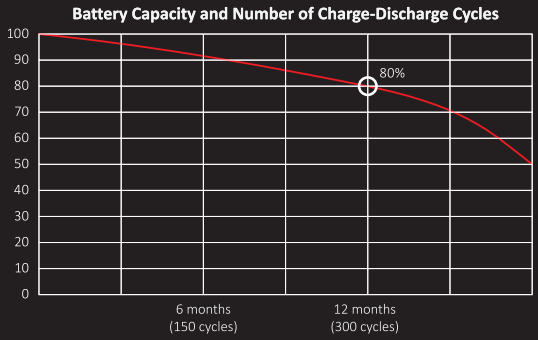

Natural Battery Wear

The battery loses charge even when stored separately from the device. The self-discharge rate is approximately 5% per month. Due to their design, rechargeable batteries have a limited service life and gradually degrade regardless of whether they are in use. This degradation accelerates at higher temperatures and when the charge level deviates from the «optimal» storage level, which is generally considered to be 40%. In other words, if the battery is not in use, it is advisable to keep the charge level between 40% and 50%.

Use Only the Original Charger

The battery's charge and discharge capability is controlled by its built-in Battery Management System (BMS). Forced «fast charging» modes using external chargers for Li-ion batteries are strictly not recommended, as charge and discharge currents are limited. Li-ion batteries do not have a so-called «memory effect». You can start charging or discharging the battery from any charge level.

Most devices have charge and discharge limits—the controller may prevent the battery charging if, for example, the charge is already above 90%. It will also prevent the battery from fully discharging, protecting the cells from damage. Even if the device is powered from the mains, the Li-ion battery should undergo a full charge/discharge cycle at least once a month (until the «low battery» warning appears). Never let the battery discharge completely. A Li-ion battery degrades quickly if stored in a discharged state for a prolonged period. If this happens, charge it immediately. If the battery remains in a discharged state for two weeks or more, irreversible capacity loss occurs in the cells, which will ultimately lead to battery failure.

Observe the Temperature Requirements

Batteries must be stored in a charged state at temperatures between +15 °C and +35 °C with normal humidity. Batteries do not perform well during prolonged operation in very high (above +40 °C) or very low (below -10 °C) ambient temperatures. Do not leave the battery in direct sunlight.

Do Not Disassemble, Burn, or Use Damaged Batteries

Under no circumstances should you attempt to disassemble the battery or charge its individual cells. For repair or maintenance, please contact an authorized service center.

Puncturing or crushing the cells can cause an internal short circuit, leading to fire and explosion. Melting of lithium due to high temperatures can also cause an explosion. If the seal is broken, water or condensed atmospheric moisture can enter the cell, potentially triggering a reaction that releases hydrogen and causes a fire. You can check the current battery status using the battery indicator, which is available on almost all devices (please check its location and operation method at the time of purchase).

CAUTION!

- Be careful — damaged batteries may release harmful substances.
- If the battery is replaceable (removable), and you discover problems with its performance, contact a service center (see the warranty period in the warranty information). If the battery is built-in (an integral part of the device), the warranty applies to the device itself. You should also contact a service center. The sooner a malfunctioning battery is taken in for repair, the better the chances of restoring it at minimal cost.
- Battery operating time depends on many other factors, and the actual operating time may differ from the stated value.
- Rechargeable batteries have a limited number of charge cycles and may eventually need replacement (see the limited warranty conditions for the battery in the warranty information). Battery operating time depends on the usage mode and settings.


Specifications

- Model: ARDW-FRPL3311-BK, ARDW-FRPL3311-WT, ARDW-FRPLK3311-OG
- Trademark: ARDOR GAMING
- Mouse type: Wireless/wired
- Number of buttons: 7
- Optical LED sensor: PixArt PAW3311
- DPI levels: 1000–1600–3200–5000 DPI (max. 12000 DPI)
- Polling rate: 125–250–500–1000 Hz
- Maximum tracking speed: 300 IPS
- Acceleration: 35 G
- Backlight: RGB, 7 modes
- Battery: Li-ion, 500 mAh
- Power supply: 4.2 V ⎓ 48 mA
- Battery charging time: Up to 2.5 hours
- Battery life:
  - Up to 168 hours at 500 Hz with backlight
  - Up to 71 hours at 1000 Hz without backlight
  - Up to 12.5 hours at 1000 Hz with backlight
- Switches: HUANO 20 M
- Encoder: F-switch
- Material: Plastic
- Connection: USB Type-C, 2.4G radio channel, BT 5.0
- Cable: 1.8 m, braided
- Compatibility: Windows, macOS 10.12 or later, iOS 9 or later
- Dimensions: 130 × 73 × 44 mm
- Net weight: 113 ± 2 g
- Wireless standard: IEEE 802.15.4
- Frequency range: 2402–2480 MHz
- Transmitter power: 0 dBm
- IP code: IPX0
- Docking station power parameters:
  - Input: 5 V ⎓ 56 mA
  - Output: 4.2 V ⎓ 48 mA
- Scope of application: Domestic

Package Contents

- Device
- PTFE mouse feet set × 2
- Additional side grip pads
- Charging cable
- Docking station
- User manual

Device Diagram

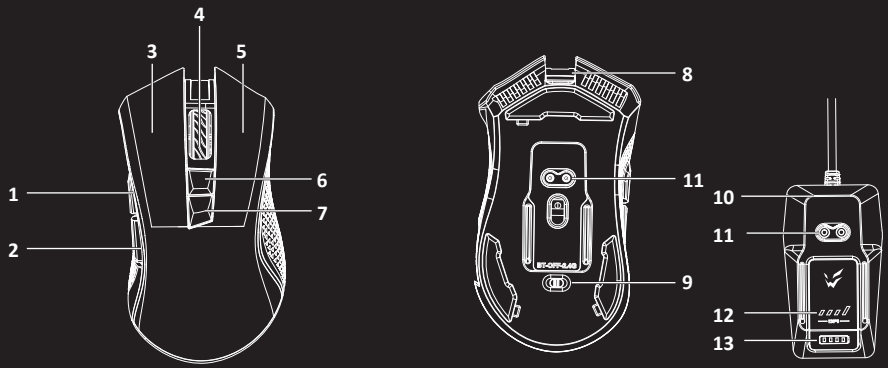

1. «Forward» button
2. «Backward» button
3. Left mouse button
4. Scroll wheel / middle mouse button
5. Right mouse button
6. DPI increase button
7. DPI decrease button
8. Charging port
9. Power/mode switch
10. Docking station
11. Charging contacts
12. DPI level indicator
13. Battery level indicator

Getting Started

CAUTION!

Before using the mouse, remove the blue protective film from the mouse feet.

Connecting the Mouse

Wired Mode

1. Connect one end of the cable to the corresponding port on the mouse and the other end to a USB port on your computer.
2. If the mouse is connected to a computer via cable while operating in wireless mode, it will automatically switch to wired mode.

2.4 GHz Connection

Note: The mouse is paired via 2.4 GHz wireless at the factory. To use it, simply set the mouse to «2.4G» mode and connect the docking station to your PC. If you experience pairing issues, follow the steps below.

1. Move the switch on the bottom of the mouse to the «2.4G» position.
2. Press and hold the left, middle, and right mouse buttons simultaneously for 3 seconds. The mouse backlight will start flashing green, indicating that the device has entered pairing mode.
3. Connect the docking station to a USB port on your PC.
4. The mouse is ready to use.

Bluetooth Connection

1. Move the switch on the bottom of the mouse to the «BT» position.
2. Press and hold the left, middle, and right mouse buttons simultaneously for 3 seconds. The mouse backlight will start flashing blue, indicating that the device has entered pairing mode.
3. Find «FURY PLUS» in the list of available Bluetooth devices on your PC.
4. Once the connection is established, the mouse is ready to use.

Software

1. This device comes with software that allows you to customize the mouse settings.
2. You can download the software from the product page at https://www.dns-shop.ru/.
3. Before downloading, make sure you have opened the correct product page. To find it, enter the alphanumeric model designation printed on the packaging, in the user manual, or on the bottom of the mouse.
4. The software allows you to reassign mouse buttons, assign macros, and change the default button functions.

Note: If the software does not detect the mouse, check whether any other software is running on your computer and close all third-party applications. If more than one mouse is connected to your computer, disconnect the other mouse first.

If no other applications are running and only one mouse is connected, try uninstalling the software, temporarily disabling your antivirus protection, and downloading the software again as described above. Then check whether the software detects the mouse. If the issue persists, contact customer support.

DPI Settings and Indication

- DPI levels: 1000–1600 (default)–3200–5000 DPI.
- Press button (6) or (7) to cycle through the DPI levels.
- The indicator on the mouse scroll wheel shows the current DPI level:
  - 1000 DPI: Red.
  - 1600 DPI: Green.
  - 3200 DPI: Blue.
  - 5000 DPI: Yellow.

Note: DPI can also be adjusted using the software. The maximum available DPI setting is 12,000.

Polling Rate

The polling rate can be set to 125, 250, 500, or 1000 Hz using the software.

Default value: 1000 Hz.

Changing Backlight Modes

To switch between lighting modes, press and hold buttons (4), (5), and (1) for 1–2 seconds.

Notes

- There are 7 lighting modes available.
- Lighting modes can also be configured using the software.

Charging

When the battery level is low, the mouse backlight will start flashing. Connect the mouse to your PC using the charging cable or place it on the docking station.

1. When the charging cable is connected, the mouse will enter self-diagnostic mode, and its backlight will turn green.
2. When the mouse is placed on the docking station, its backlight will remain green and turn off once charging is complete.

Replacing the Side Grip Pads

The mouse comes with additional replacement side grip pads. These pads can be used to replace the original ones if they become damaged or worn. Replacing the pads helps restore the comfort and appearance of your mouse.

To replace the side grip pads:

1. Hold the mouse securely by its body. Carefully lift the edge of the existing pad and gently peel it off. Do not pull abruptly to avoid damage.
2. Make sure the side of the mouse is free from dirt or adhesive residue that could prevent the new pad from attaching properly.
3. Remove the protective film from the underside of the new pad and align it with the corresponding area on the side of the mouse. Press the pad into place. Make sure it is firmly and evenly attached along its entire perimeter.

Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal

- The device does not require installation or permanent mounting.
- The device must be stored in its original packaging, on heated premises, both at the manufacturer's and at the consumer's sites. The ambient temperature should be between +5 °C and +40 °C, and the relative humidity should not exceed 80% (non-condensing). The storage area must be free from aggressive contaminants (e.g., acid or alkali vapors) that could cause corrosion.
- The device must be transported under dry conditions.
- The device requires careful handling. Protect it from exposure to dust, dirt, impact, moisture, fire, and other hazards.
- Sale or distribution of the device must be carried out in accordance with local legislation.
- Upon expiration of the device's service life, it must not be disposed of with unsorted household waste. Instead, it must be taken to an authorized collection point for electrical and electronic equipment for subsequent recycling and disposal in accordance with federal or local legislation. By ensuring proper disposal of this product, you help conserve natural resources and prevent potential harm to the environment and human health that may result from improper handling. For more detailed information about collection and disposal points for this product, please contact your local municipal authorities or your household waste disposal service.
- If a device malfunction is detected, immediately contact an authorized service center or dispose of the device.

Warranty Information

The manufacturer guarantees the device will function properly throughout the warranty period and be free from defects in materials and assembly. The warranty period commences on the date of purchase and applies to new products only. Warranty service includes free repair or replacement of defective parts that fail during the warranty period, provided the failure is not caused by consumer misuse and the product is operated in accordance with the user manual. Repairs or part replacements shall be performed at authorized service centers.

Warranty Period: 24 months

Service Life: 24 months

For the up-to-date list of authorized service centers, please visit: https://www.dns-shop.ru/service-center/

Additional Information

Manufacturer: DONGGUAN SHANGGUI ELECTRONIC TECHNOLOGY CO., LTD.
Building 6, No.6, Hengtong Road, Houjie Town, Dongguan, Guangdong, China.

Made in China.

The product meets the requirements of the technical regulations of the TR CU (EAEU).

Product specifications, information and appearance are subject to change without prior notice, for quality improvement of our products.

Production date (mm.yyyy): _____ v.1

LEARN MORE:
ARDOR-GAMING.COM
VK.COM/ARDOR_GAMING