User Manual
Wall-Mounted Clothes Drying Rack Luna

aceline

Dear Customer,

Thank you for choosing our products.
We are pleased to offer you products and devices designed and manufactured to the highest standards of quality, functionality, and design. Before using the product, please read this manual carefully. It contains important information regarding your safety, as well as recommendations for the proper use and care of the product. Please keep this manual in a safe place and use it as a reference guide during future operation of the product.

Intended Use

The clothes drying rack is designed for drying damp clothes.

Safety Precautions

- This product is not intended for commercial use.
- This product is not intended for use by children or persons with reduced physical, sensory, or mental capabilities, unless they are supervised by a person responsible for their safety. Do not allow children to play with the product.
- Wring out clothes before hanging them on the drying rack.

Specifications

Model	Luna
Trademark	Aceline
Body material	Steel
Mounting type	Wall-mounted
Dimensions (L × W)	100 × 49.8 cm
Maximum load	12 kg
Finish type	Matte body and glossy tubes
Scope of application	Domestic

Package Contents

- Clothes drying rack.
- User manual.

Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal

- The installation and mounting conditions for the product are described in the «Assembly» section of this user manual.
- The product must be stored in its original packaging, on heated premises, both at the manufacturer's and at the consumer's sites. The ambient temperature should be between +5 °C and +40 °C, and the relative humidity should not exceed 80% (non-condensing). The storage area must be free from aggressive contaminants (e.g., acid or alkali vapors) that could cause corrosion.
- The product must be transported under dry conditions.
- The product requires careful handling. Protect it from exposure to dust, dirt, impact, moisture, fire, and other hazards.
- Sale or distribution of the product must be carried out in accordance with local legislation.
- Disposal of this product must be carried out in accordance with local waste recycling regulations. By ensuring proper disposal of this product, you help prevent potential harm to the environment and human health resulting from uncontrolled waste disposal and promote the sustainable reuse of material resources. For more detailed information on collection and disposal points for this product, please contact your local municipal authorities or household waste collection service.
- If a product malfunction is detected, immediately contact an authorized service center or dispose of the product.

Warranty Information

The manufacturer warrants that the product is free from defects in materials and assembly. The warranty period commences on the date of purchase and applies only to new products. Warranty service includes free repair or replacement of defective parts that fail during the warranty period, provided the failure is not caused by consumer misuse and the product is operated in accordance with the user manual. Repairs or part replacements shall be performed at authorized service centers. Failure to follow the described safety precautions will void your warranty.

Warranty Period: 12 months
Service Life: 12 months

For the up-to-date list of authorized service centers, please visit: https://www.dns-shop.ru/service-center/

Additional Information

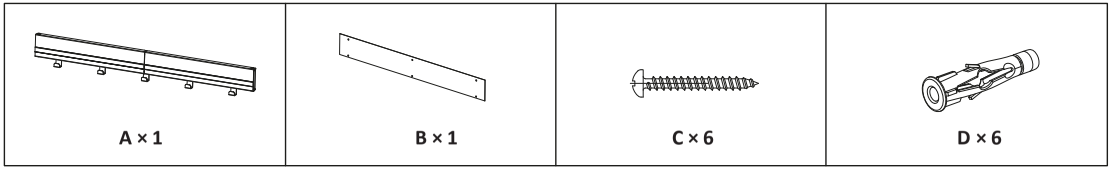
Manufacturer: Guangdong Wireking Metal Manufacture Co., Ltd.
No. 11, Wusha, Shunpan Road, Daliang St., Shunde, Foshan, Guangdong, China.

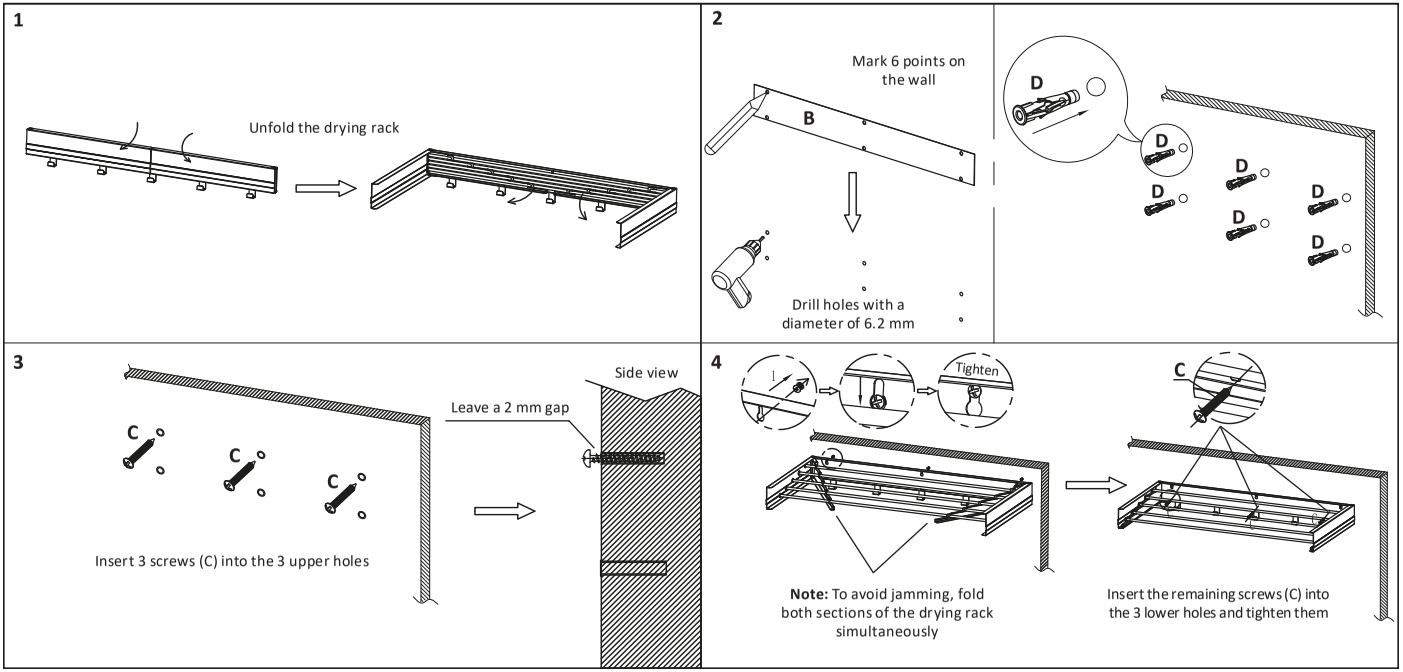
Made in China.

Product specifications, information and appearance are subject to change without prior notice, for quality improvement of our products.

Production date (mm.yyyy):_____v.1

Assembly


A × 1
B × 1
C × 6
D × 6


1
Unfold the drying rack
2
Mark 6 points on the wall
B
Drill holes with a diameter of 6.2 mm
D
3
C
Insert 3 screws (C) into the 3 upper holes
Leave a 2 mm gap
Side view
4
Tighten
Note: To avoid jamming, fold both sections of the drying rack simultaneously
Insert the remaining screws (C) into the 3 lower holes and tighten them