User Manual

LCD/LED Monitor Mount
DMM-WML01
DMM-BML01
DMM-GL1L01

DEXP

Contents

Intended Use **3**

Specifications **3**

Package Contents **3**

Safety Precautions **3**

Dimensions **4**

Installation Instructions **5**

Installation 6

Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal **9**

Warranty Information **9**

Additional Information **9**

Dear Customer,

Thank you for choosing our products.
We are pleased to offer you appliances and devices designed and manufactured to the highest standards of quality, functionality, and design. Before using the device, please read this manual carefully. It contains important information regarding your safety, as well as recommendations for the proper use and care of the product. Please keep this manual in a safe place and use it as a reference guide during future operation of the product.

Intended Use

This product is designed for mounting a monitor.

Specifications

- Model: DMM-WML01, DMM-BML01, DMM-GL1L01.
- Trademark: DEXP.
- Maximum load: 10 kg.
- Screen size: 17–32''.
- Swivel angle: 90°.
- Tilt angle (down): -45°.
- Tilt angle (up): 80°.
- Supported VESA Sizes: 75 × 75; 100 × 100.
- Scope of application: Domestic.


Package Contents

- Mount.
- Mounting hardware.
- User manual.

Safety Precautions


- This mount is intended for indoor use only.
- The hardware kit contains small parts that pose a choking hazard if swallowed. Keep these parts out of the reach of children.
- Use the screws included in the kit for installation. Tighten them securely, but do not overtighten. Excessive tightening may damage the components.
- Before assembling the mount and installing the monitor, pay attention to the VESA standards, screen diagonal, and the maximum load capacity of the product. Using the mount with monitors that exceed the specified rated weight may result in instability and falling.
- Assembly and installation of the product must be carried out in accordance with the «Installation Instructions» section. Incorrect assembly may cause damage and injury.
- Installation of the mount may require specialized equipment: a screwdriver, a drill (not included). The use of personal protective equipment is recommended (not included). Installation must be performed by professionals.
- Regularly check the reliability of the mount's attachment (approximately once every 3 months).
- Do not make any modifications to the design of the mount.
- This product is not intended for use by children or persons with reduced physical, sensory, or mental capabilities, unless they are supervised by a person responsible for their safety. Do not allow children to play with the product.
- This product is not intended for commercial use.

Dimensions

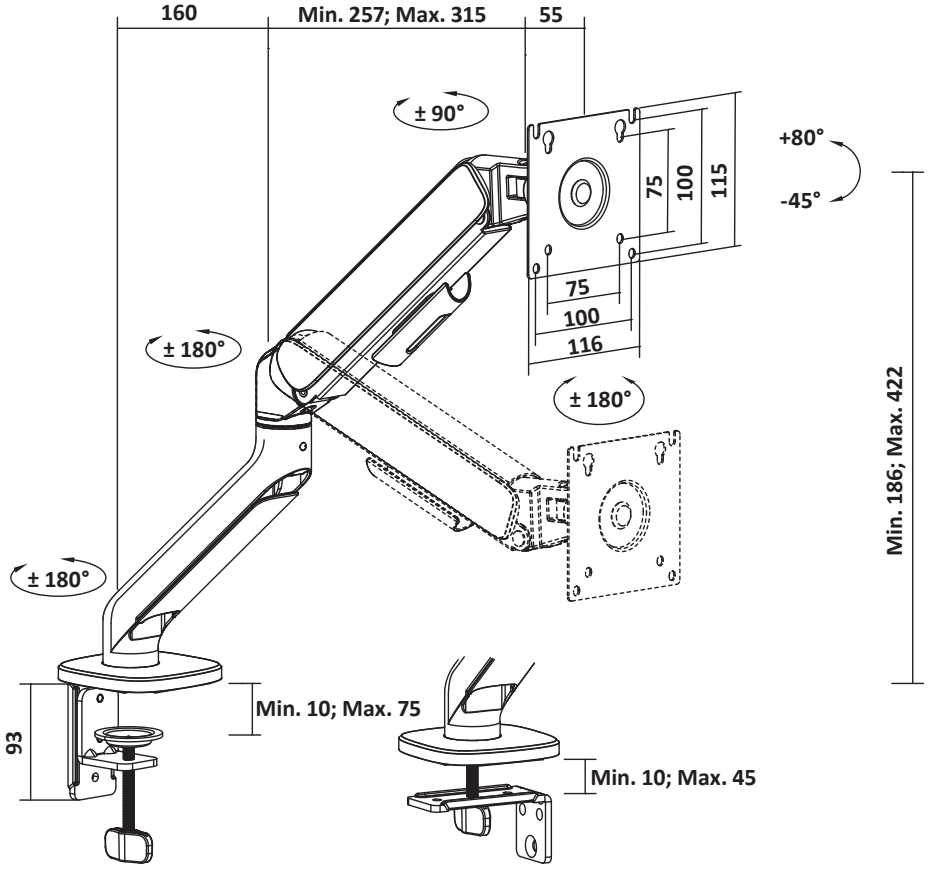


Note: Dimensions are specified in millimeters.

Installation Instructions

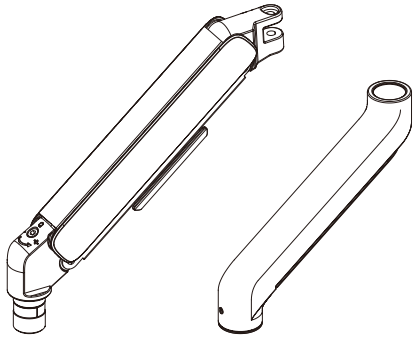


A (× 1)


B (× 1)




C (× 1)



D (× 1)



E (× 1)



F (× 1)



G (× 4)
M4×12



H (× 2)
M6×10



I (× 1)
M8×20



J (× 1)
M8×35




K (× 4)
D5



L (× 1)
4 mm



M (× 1)
5 mm





(× 1)
35×10×5 mm

Installation


1


You can install the desk clamp in two ways:







Method 1: Desk edge mounting
(for desks with a thickness of 10–75 mm).

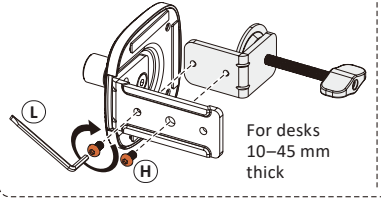


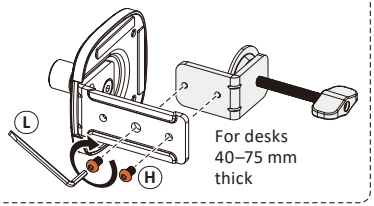





Method 2: Through-desk mounting
(for desks 10–45 mm thick;
mounting hole diameter ⌀ 10–60 mm).











2

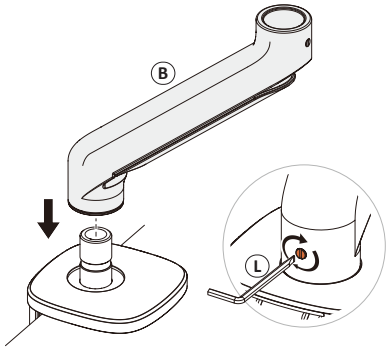


3

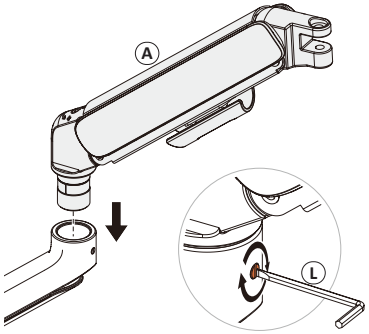


4


If the VESA plate does not tilt because it is too tightly secured, loosen the screw using the included hex key.









5

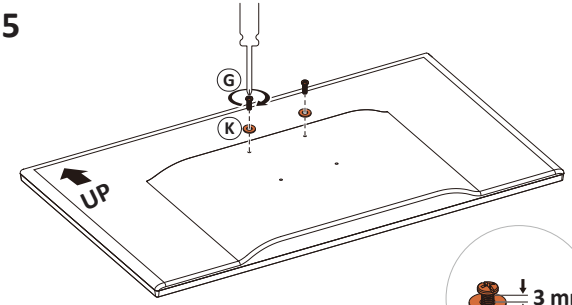




6




CAUTION! Installation must be performed by at least 2 people.



CAUTION! Do not release the monitor immediately after mounting it on the bracket. To avoid injury and damage, ensure it is securely fixed. If the bracket moves up or down freely, proceed to the next step to adjust its position.

7 **CAUTION!** Installation must be performed by at least 2 people.




Adjust the spring tension only when the bracket is in a horizontal position, as shown in the figure on the left.
Use the hex key.
It is recommended to perform the adjustment with an assistant.

If the bracket moves up or down on its own, turn the adjustment screw towards the «+» or «-» sign until it remains fixed in a horizontal position.


CAUTION!
Do not overtighten the screws.

To adjust the monitor tilt angle, tighten the screws as shown in the illustration.




Adjust the monitor to the desired angle.






CAUTION!
Do not rotate the monitor beyond the edge of the desk to avoid instability and tipping over.

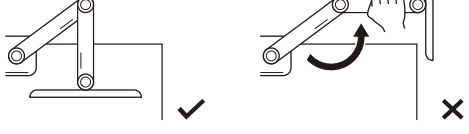

8

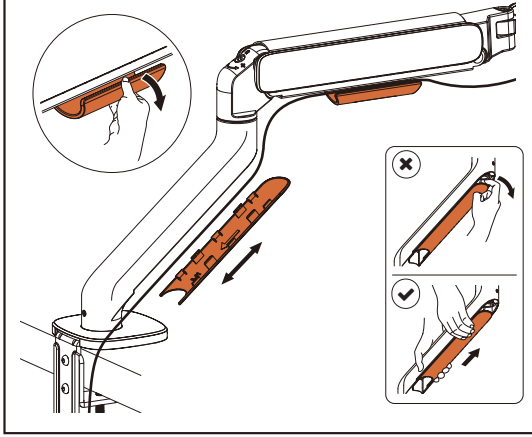

Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal

- The installation and mounting conditions for the device are described in the «Installation Instructions» section of this user manual.
- The device must be stored in its original packaging, on heated premises, both at the manufacturer's and at the consumer's sites. The ambient temperature should be between +5 °C and +40 °C, and the relative humidity should not exceed 80% (non-condensing). The storage area must be free from aggressive contaminants (e.g., acid or alkali vapors) that could cause corrosion.
- The device must be transported in a dry place.
- The device requires careful handling. Protect it from exposure to dust, dirt, impact, moisture, fire, and other hazards.
- Sale or distribution of the device must be carried out in accordance with local legislation.
- Upon expiration of the device's service life, it must not be disposed of with unsorted household waste. Instead, it must be taken to an authorized collection point for electrical and electronic equipment for subsequent recycling and disposal in accordance with federal or local legislation. By ensuring proper disposal of this product, you help conserve natural resources and prevent potential harm to the environment and human health that may result from improper handling. For more detailed information about collection and disposal points for this product, please contact your local municipal authorities or your household waste disposal service.
- If a device malfunction is detected, immediately contact an authorized service center or dispose of the device.

Warranty Information

The manufacturer guarantees the device will function properly throughout the warranty period and be free from defects in materials and assembly. The warranty period commences on the date of purchase and applies to new products only. Warranty service includes free repair or replacement of defective parts that fail during the warranty period, provided the failure is not caused by consumer misuse and the product is operated in accordance with the user manual. Repairs or part replacements shall be performed at authorized service centers.

Warranty Period: 84 months
Service Life: 84 months

For the up-to-date list of authorized service centers, please visit:
https://www.dns-shop.ru/service-center/

Additional Information

Manufacturer: Zhejiang Pujuy New Material Co., Ltd.
No. 399, 6th Zhenlong Road, Binhai Economic Development Zone, Cixi City, Zhejiang Province, China.

Made in China.

Product specifications, information and appearance are subject to change without prior notice, for quality improvement of our products.

Production date (mm.yyyy): _____v.1

