Keychron

Nape Pro Wireless Trackball Mouse User Manual

IN THE BOX:

Mouse x 1

Type - C Cable x 1


Extension Adapter x 1


Type - A Receiver x 1

User Manual x 1

Type - A to Type - C Adapter x 1

User manual

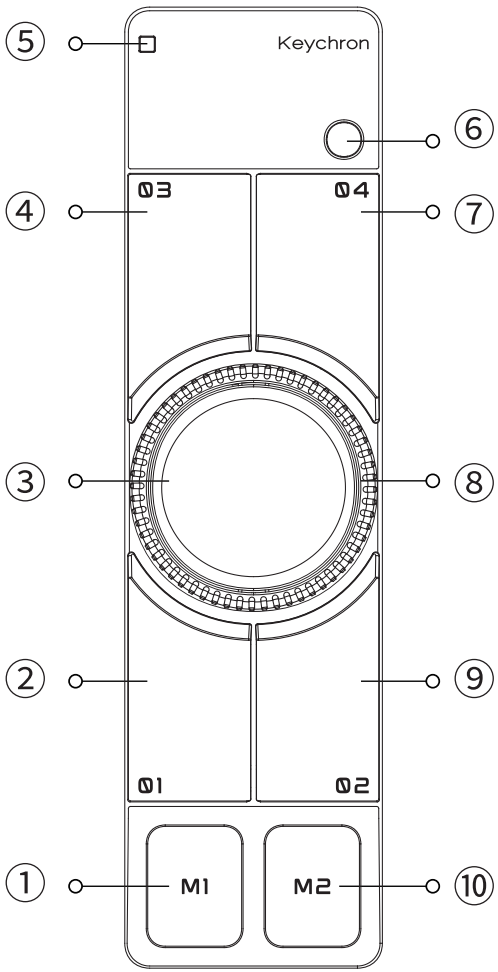

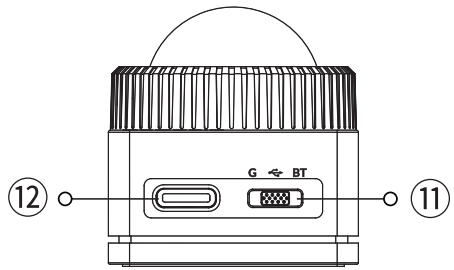

① Left button (M1)

② Backward button (01)

③ Trackball

④ Scroll lock button (03)

⑤ Mouse indicator

⑥ Round button

⑦ Angle switching button (04)

⑧ Volume Control Dial

⑨ DPI button (02)

⑩ Right button (M2)

⑪ Modes switch toggle


⑫ Type-C port

Three Modes of connection

Wired Mode:

1. When the mode switch is in middle position, the mouse won't respond if the cable is not connected.
2. Connect the cable to the TYPE-C port of the mouse and the USB port on the device. The mouse is ready to use while the indicator lights up.

* When connected by cable, the mode will default to wired mode even if the toggle is in Bluetooth mode or 2.4GHz mode.

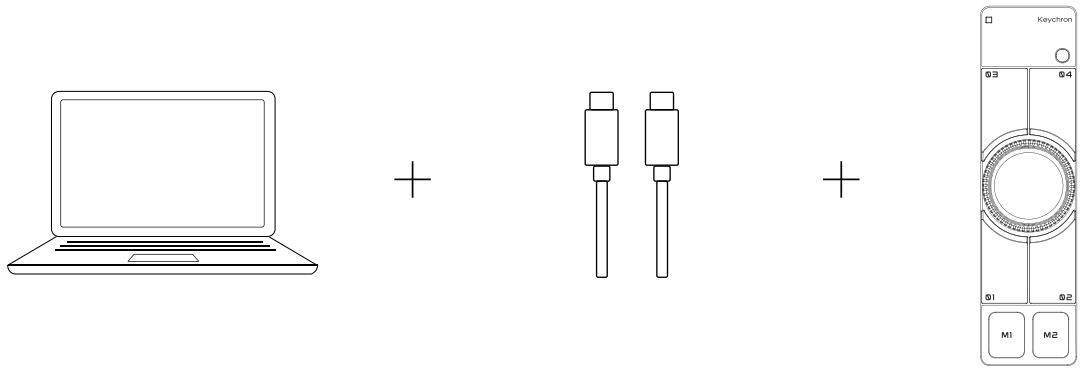


2.4GHz Mode:


1. Switch to " G " mode (2.4GHz mode), and the mouse will automatically turn on 2.4GHz paring. The mouse indicator will slowly flash green.
2. Find the 2.4GHz receiver and connect it to the device's USB. Once successfully connected, the mouse indicator will turn green and stay on for 3 seconds before dimming off. The mouse is now ready for use.
3. In 2.4GHz paring mode, the mouse indicator will slowly blink green for 3 minutes. If the mouse is not connected within 3 minutes, the indicator will turn off. If you need to reconnect, hold both the "Round button + 04 button" for 3 seconds to re-enter pairing mode.

* If you need to repair the connection in 2.4GHz mode, please unplug the 2.4GHz receiver first. Then, hold both the "Round button + 04 button" for 3 seconds, wait for the green light indicator to start flashing, and plug the 2.4GHz receiver back in to complete the pairing process.


* It is recommended that when pairing the Nape Pro in 2.4GHz mode, the mouse should be within 20cm of the receiver.

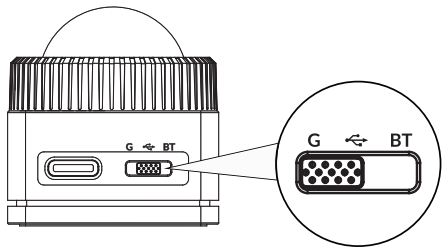


G = 2.4GHz mode

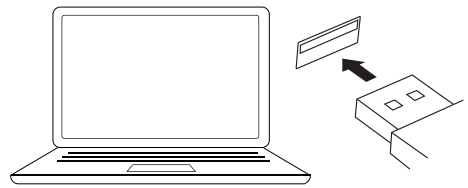


Simultaneously hold for 3 seconds
(to enter the forced paring mode)

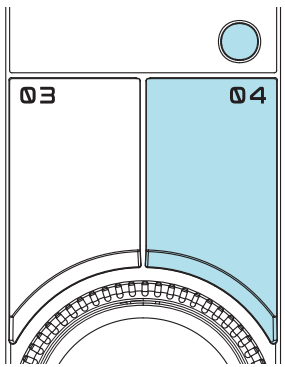

Note: For the best wireless experience, we recommend using the cable and putting the 2.4GHz receiver somewhere on your desk close to your mouse for a lower rate of latency and fewer signal interferences.

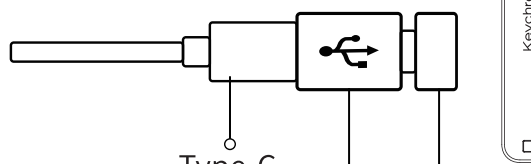

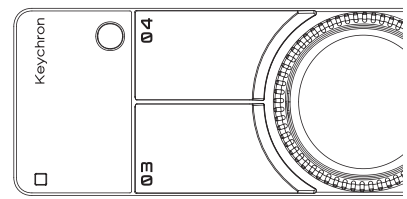


Bluetooth mode


1. Switch to " BT " Mode (Bluetooth), and the mouse will automatically turn on Bluetooth pairing mode. The mouse indicator will slowly flash blue.
2. Open the Bluetooth settings, search for a device named "Keychron Nape Pro", then click "connect" to complete paring.

Note:


* When in Bluetooth pairing mode, the mouse indicator will slowly blink in blue for 3 minutes. If it's not connected within 3 minutes, the mouse indicator will turn off. If you need to reconnect, you need to hold the "Round button + 01/02/03 button" for 3 seconds to re-enter pairing mode. The indicator will slowly blink blue.
* If the Nape Pro is in Bluetooth mode and needs to pair with a new device, hold both the "Round button + 01/02/03 button" for 3 seconds and wait for the blue light to flash on. At this point, Bluetooth has re-entered pairing mode, and you can connect the new device to the Nape Pro.
* Nape Pro supports pairing up to 3 devices, short press "Round button" + "01/02/03 button" to switch devices.

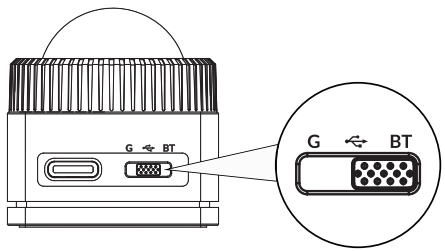

BT = Bluetooth

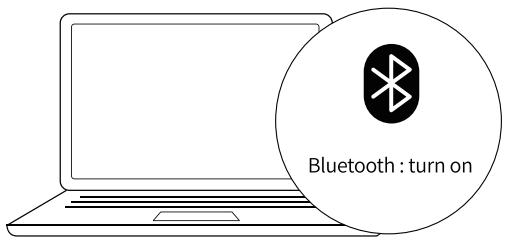




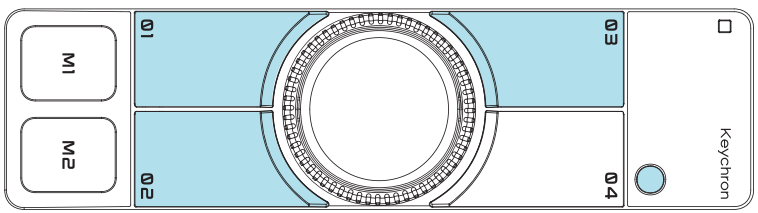


simultaneously hold for 3 seconds(to re-enter pairing mode)

DPI indicator

White light	400 DPI	Yellow light	3200 DPI
Green light	800 DPI	Red light	4000 DPI
Blue light	1600 DPI(default)		

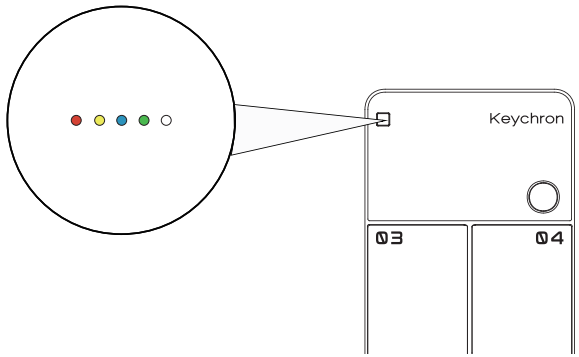


*Note: Please press the 02 button to switch DPI.
For more DPI settings, configuration via the mouse driver is required.

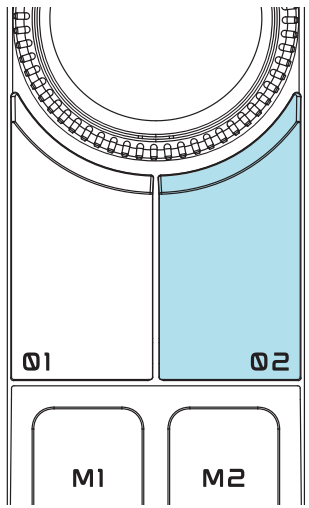


Angle Switching

Mouse Indicator	Angle
White	0°
Green	45°
Blue	90°
Yellow	135°
Red	180°
Purple	225°
Cyan	270°
Orange	315°

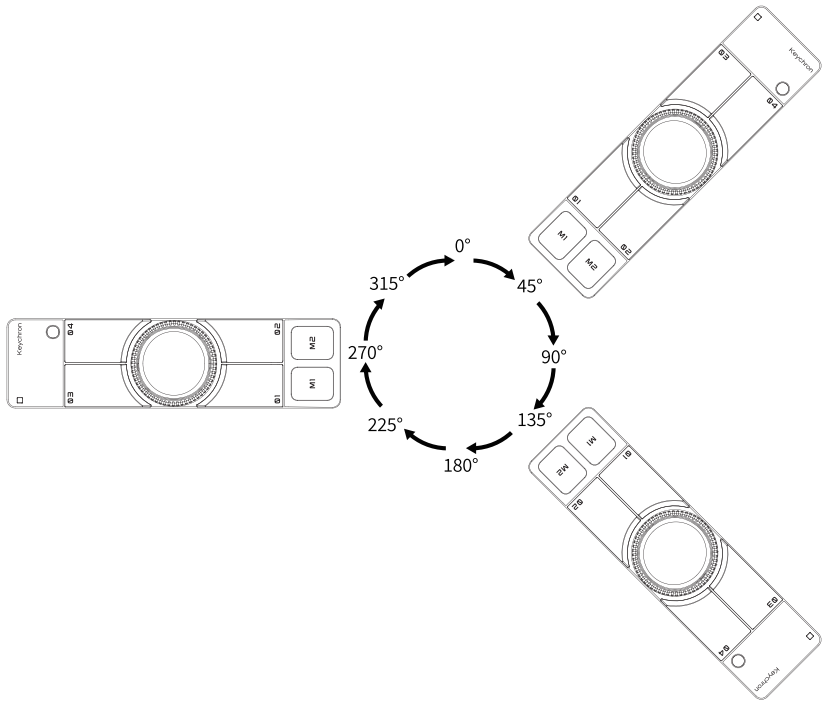


*Please press the Angle switching button (04 button) to switch angle. For more angle settings, configuration via the mouse driver is required.

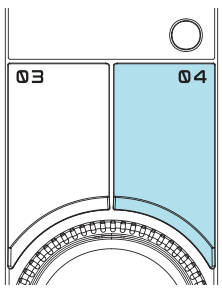


Usage Scenarios


0°

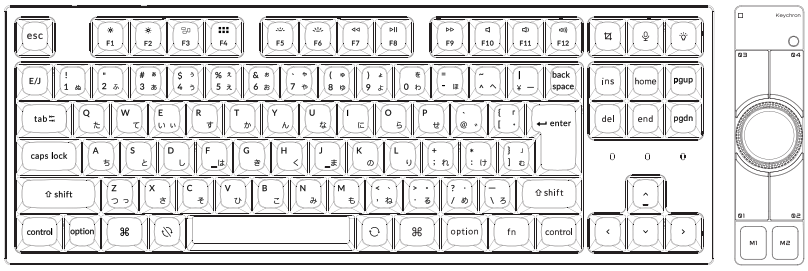

Place vertically inside the split keyboard

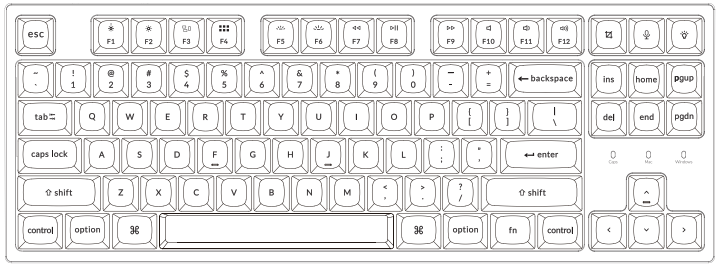



90°



Place horizontally under the keyboard


315°



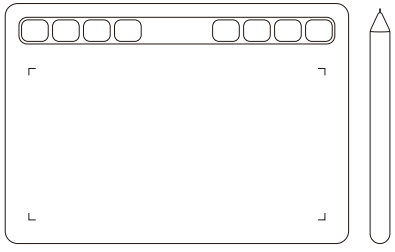


Place it next to drawing tablet as a macro pad.

135°



or

225°



Place it diagonally to use as a multi-button trackball

Report Rate

Please configure the polling rate settings through the Keychron Launcher online program: launcher.keychron.com.

Charging indicator explanation

Fully Charged	The mouse indicator will stay GREEN.
Low Power	The mouse indicator will slowly blink RED.
Charging	The mouse indicator will stay RED.


* The mouse is compatible with all USB ports. For the best signal and charging speed, connecting to the USB 3.0 port is recommended when charging or in use.

* If the mouse is connected by the USB Type - C cable when charging but not paired with any devices:
- The mouse indicator will stay RED when charging.
- The mouse indicator will stay GREEN when fully charged.

Note: The product supports up to 5V charging voltage and 100 mA charging current. We are not responsible for any problems caused by improper recharging.

Status indicator


2.4 GHz Mode	*The mouse indicator slowly blinks green - Ready to be paired. *The mouse indicator quickly blinks green - Pairing with the previous device.
Bluetooth Mode	*The mouse indicator slowly blinks blue - Ready to be paired. *The mouse indicator quickly blinks blue - Pairing with the previous device.
Low Power	The mouse indicator will slowly blink red.

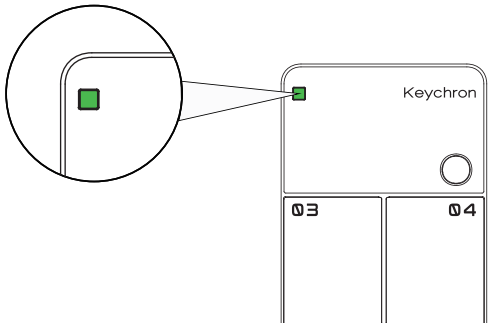

How to factory reset

Hold down the 01 / 02 / 03 / 04 button for 3 seconds, and the mouse indicator will blink. It will blink three times to indicate that the factory reset is successful, and the polling rate resets to 1K.

Simultaneously hold for 3 seconds
(starts factory reset)

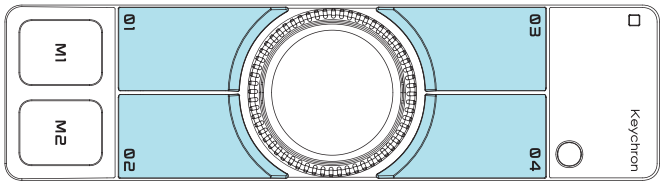

Driver Software

Please visit launcher.keychron.com to use the online Launcher web app to remap the buttons, create macro commands, set mouse system features, and more. If the Launcher cannot recognize your mouse, please reach our support to get the instructions.
*The Keychron Launcher does not support bluetooth connection.

Auto-Sleep mode

Auto-Sleep mode will not be activated in wired mode. When in Bluetooth mode or 2.4GHz mode, the mouse will go to Auto-Sleep mode after 10 minutes of sitting idle to save the battery. Move or click the mouse to wake it up.

Mouse specification

Size: 135*35.4*36.7mm

Report rate (polling rate): 125Hz - 500Hz - 1000Hz

Sensor: PixArt 3222

Resolution: 0 - 4000DPI

Mouse micro switches: Huano Silent Micro Switch (20 million clicks life time)

2.4GHz / Bluetooth connection range: Approx 10m of open space

Battery capacity: 200mAh

Usage duration: 50 Hours (125Hz)
40 Hours (1000Hz)

Recharge time: 2 Hours

Charging port: Type - C

Connection mode: 2.4GHz - Bluetooth - Wired

Device name: Keychron Nape Pro

Keychron, Inc.
Dover, DE 19901, United States
Find us at:
https://www.keychron.com
support@keychron.com
@keychron
@keychron
@keychronMK
Designed by Keychron
Made in China