

Camelion®


Standard Charger



Model: BC-1010B

OPERATING INSTRUCTIONS

- Unplug the charger and remove the batteries when fully charged or not in use.

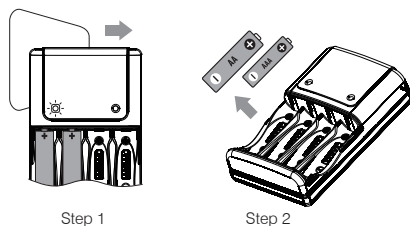

Specifications

Input: 100-240V~ 50/60Hz 4W max.
Output: 2 x (2.8V --- 200mA) AA/AAA

For your safety

To prevent damage to this charger or injury to yourself or to others, please read the following operating instructions before usage. Keep these operating instructions for your reference when needed.

Introduction

Congratulations on your purchase of a Cametronics Product. This Cametronics charger offers you the following convenient functions.

- **2 Independent charging channels**
- **Charges 1 or 2 pairs of AA/AAA Ni-MH or Ni-Cd batteries**
- **Low Charging current for longer battery life** Since this unit uses a relatively low charging current the lifetime of your batteries is maximized.
- **Reverse Polarity Protection** The special designed charge slots structure protects the charger and batteries from being damaged by incorrectly installed batteries.
- **Low Battery Leakage Current** If the battery charger is not connected to the mains and batteries are left in the charger, battery discharge will be controlled using a lowest possible, pre-determined current.
- **Worldwide Use AC** AC100-240V~50/60Hz

Some Standard Charging Times

Type of Battery	Charging time
Ni-MH AA 2700mAh	17h
Ni-MH AA 2000mAh	14h
Ni-MH AA 1500mAh	11h
Ni-MH AAA 800mAh	5h
Ni-Cd AAA 300mAh	2h


Care & Troubleshooting Tips

- After full charging LED lights remain on. Please monitor charging time to ensure batteries are fully charged.
- Only charge Ni-MH or Ni-Cd AA/AAA batteries in the unit.
- Batteries must be the same brand and capacity.
- Clean the charger with a clean dry cloth. Keeping the metal contacts clean will also help maintain performance.
- If the LED status indicator does not light up make sure that the unit is properly plugged into the wall and the switch is set to the correct position. If the indicator still fails to light up the battery may be defective or improperly inserted.


- **2 LED Indicators** The red LEDs light up to indicate charging is in progress. The LED(s) do not change color when batteries are fully charged.

Directions


- Insert 2 or 4 AA/AAA batteries in the battery compartment.

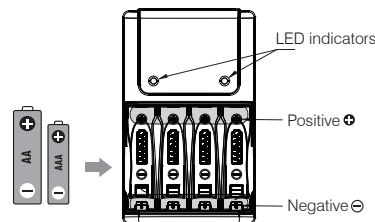

- Plug the unit into the electric outlet.



The red light LEDs indicate the batteries are inserted correctly and are being charged.

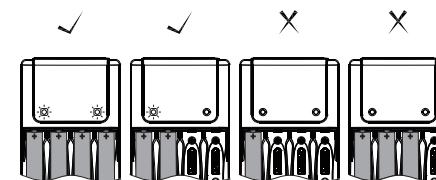

! Cautions

- This charger is for indoor use only. Always keep it dry and avoid exposure to even light moisture.
- This charger is intended for use with CAMELION rechargeable Nickel Metal Hydride (Ni-MH) and Nickel Cadmium (Ni-Cd) batteries.
- Do not charge non-rechargeable batteries (e.g. zinc-carbon, alkaline, lithium), as this may cause personal injury, and damage to the charger.
- Do not operate this charger with a damaged plug or cable.
- Do not charge different types of batteries and/or capacities together, unless the charger has appropriate, individual, charging channels.
- Do not repair this charger and/or the batteries under any circumstances.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.

