

lead-acid battery 12V1.2AH



General Features

- ▶ High corrosion resistant performance: Pb-Ca multi-alloy grid
- ▶ High energy density and power density
- ▶ Optimized capability of instant high-current discharging
- ▶ Excellent charge acceptance ability
- ▶ Excellent deep cycle discharge capability
- ▶ Strong high and low temperature performance
- ▶ Precision sealing technology



Dimension: 98(L) × 42(W) × 53(H) × 59(TH) / (±2)

Unit: mm

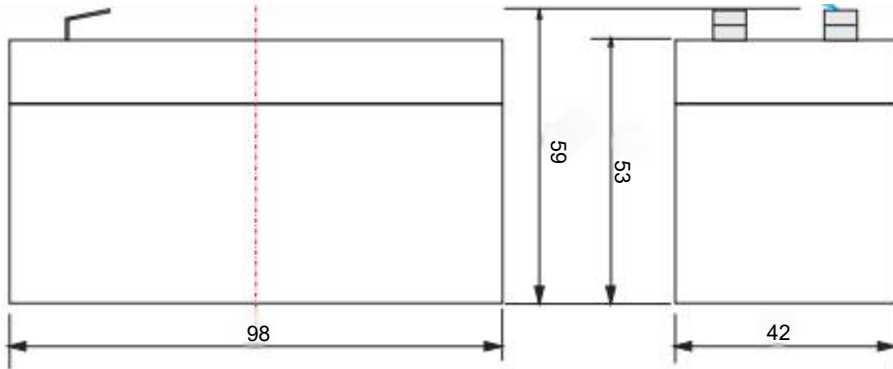

Specification	
Nominal Voltage	12V
Nominal Capacity	1.2Ah
Design life	1 ~ 2 years
Terminal	F1/F2
Approx. Weight	Approx. 0.55Kg ± 3% (1.21lbs ± 3%)
Container Material	ABS
short-circuit current	130A
Internal resistance(Full charged at 25°C:)	92.0 mΩ
Self discharge	3% of capacity declined per month at 25°C
Operating Temperature	
Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)
Charge Method(25 °C)	
Charge current:	Max. 0.3A;Recom.0.12A
Float charge:13.5-13.8V	recom.13.8V(-18mV/ °C)
Equalize charge:13.8-14.1V	recom.14.1V(-24mV/ °C)
Cycle charge:14.4-15.0V	recom.14.7V(-30mV/ °C)

Standards

Executive standard GB/T 19639.1-2014

Applications

- ▶ UPS/EPS
- ▶ Power systems
- ▶ Telecommunications system
- ▶ Emergency lighting、 Auto control system
- ▶ Solar/wind generating storage cyclic
- ▶ Other general purpose

Rated Capacity


20Hour Rate (0.06A to 10.5V)	1.2Ah
3Hour Rate (0.31A to 10.2V)	0.93Ah
1Hour Rate (0.77A to 9.6V)	0.77Ah

Attain Certificate




lead-acid battery 12V1.2AH


Discharge characteristic

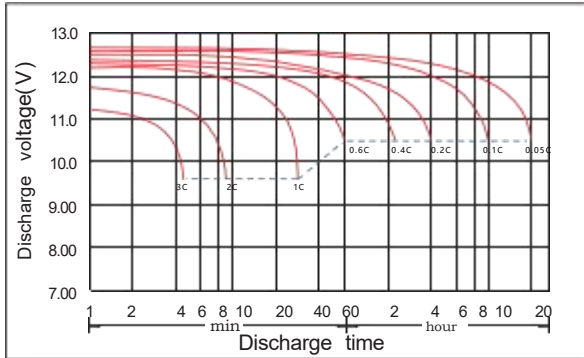


Charging characteristic

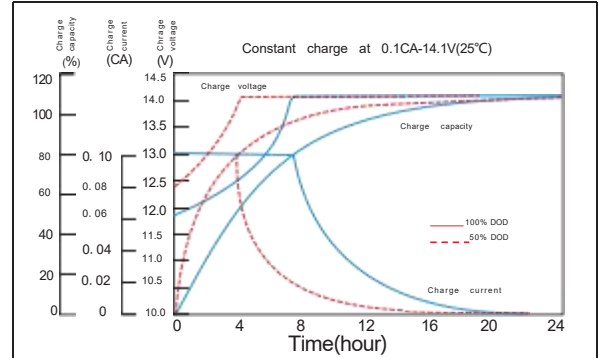

The effect of temperature on capacity

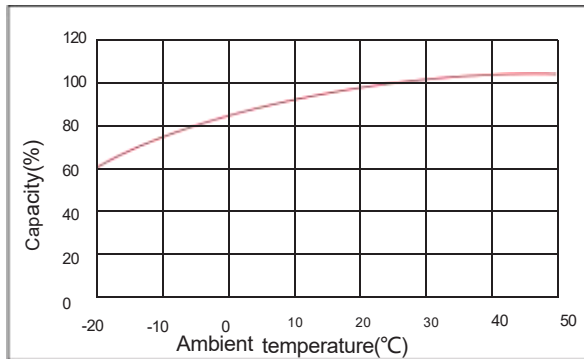

The effect of temperature on float life

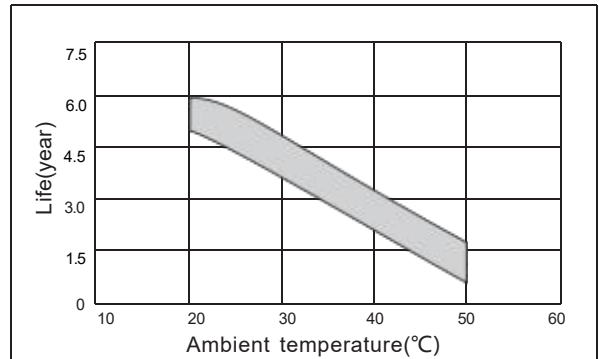

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	3min	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	10h	20h
1.60V	4.32	3.17	2.22	2.02	1.62	1.22	0.93	0.77	0.54	0.43	0.31	0.25	0.21	0.18	0.111	0.063
1.65V	4.08	3.14	2.18	2.00	1.59	1.21	0.91	0.76	0.54	0.43	0.31	0.25	0.21	0.18	0.110	0.062
1.70V	3.84	3.08	2.10	1.96	1.55	1.19	0.90	0.76	0.53	0.43	0.31	0.25	0.21	0.18	0.115	0.061
1.75V	3.60	3.02	1.94	1.92	1.51	1.17	0.88	0.74	0.52	0.42	0.30	0.24	0.20	0.17	0.113	0.060
1.80V	3.36	2.96	1.87	1.88	1.48	1.14	0.86	0.73	0.51	0.41	0.30	0.24	0.20	0.17	0.106	0.059
1.85V	3.12	2.92	1.80	1.82	1.44	1.13	0.85	0.72	0.50	0.41	0.29	0.23	0.20	0.17	0.104	0.058

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

FV/Time	3min	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	10h	20h
1.60V	7.2	6.4	4.6	4	3.31	2.44	1.84	1.4	0.94	0.73	0.51	0.44	0.36	0.32	0.19	0.11
1.65V	6.91	6.14	4.42	3.84	3.18	2.34	1.77	1.34	0.9	0.7	0.49	0.42	0.35	0.31	0.18	0.11
1.70V	6.77	6.02	4.32	3.76	3.11	2.29	1.73	1.32	0.88	0.69	0.48	0.41	0.34	0.3	0.18	0.11
1.75V	6.48	5.76	4.14	3.6	2.98	2.2	1.66	1.26	0.85	0.66	0.46	0.4	0.32	0.29	0.17	0.1
1.80V	6.26	5.57	4	3.48	2.88	2.12	1.60	1.22	0.82	0.64	0.45	0.38	0.31	0.28	0.17	0.1
1.85V	5.90	5.25	3.77	3.28	2.72	2	1.51	1.15	0.77	0.6	0.42	0.36	0.3	0.26	0.16	0.09