
QUICK GUIDE

DUAL DOCK STAND

DOCKING STATION WITH NVME SSD ENCLOSURE

1

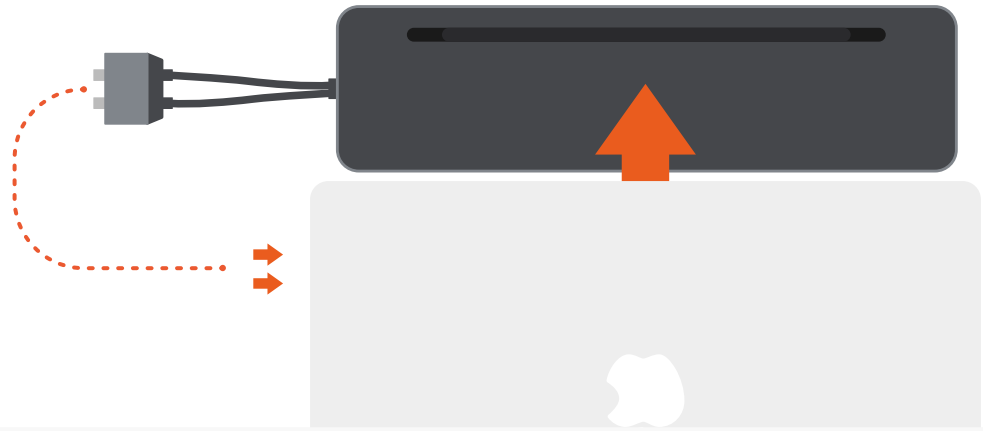


Connect the dual cable connectors to the dual USB-C ports on your host device.
Both cables must be connected in order for full functionality

2



If using with a host device other than a MacBook, slide the aluminum cable cover down to release the cables.
Both cables must be connected in order for full functionality


3

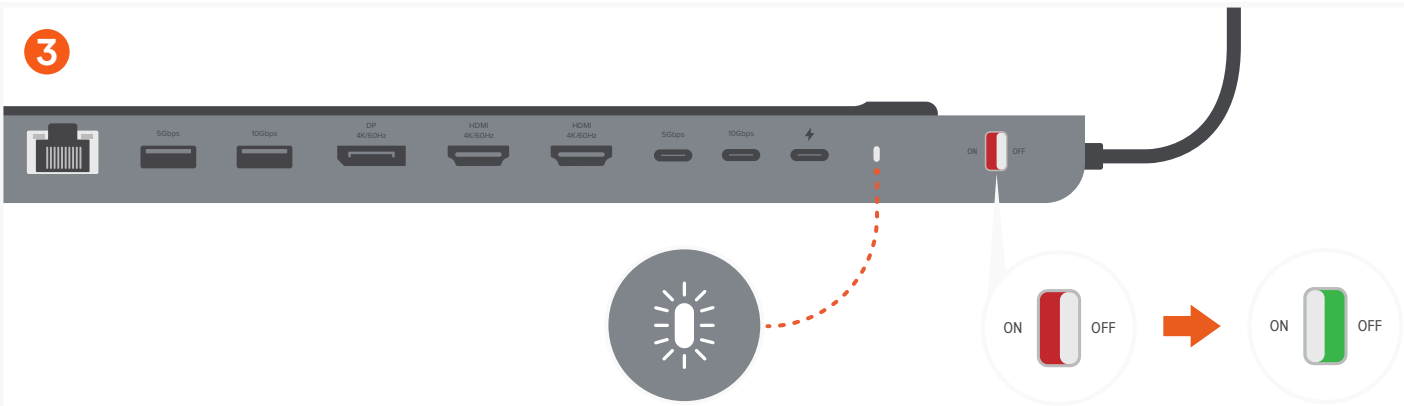

Slide the power switch to the left from red to green in order to turn on the Dock.
White LED will turn on signifying the dock is on


PORTS AND CONNECTORS

4

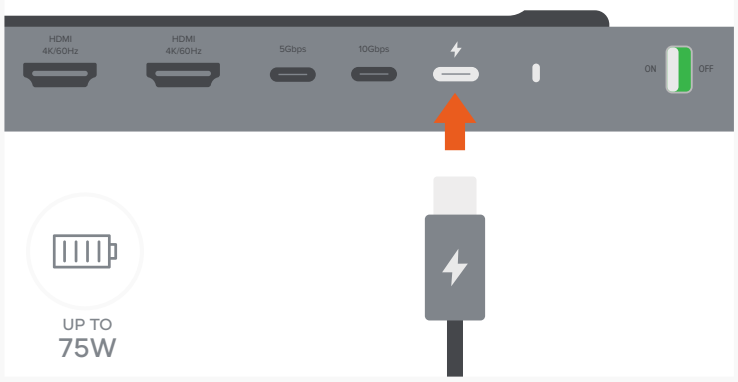


Use the USB-C PD port to charge your device up to 75W.
~15W is used for the docks operation
USB-C charging port does not support video output or data transfer

5

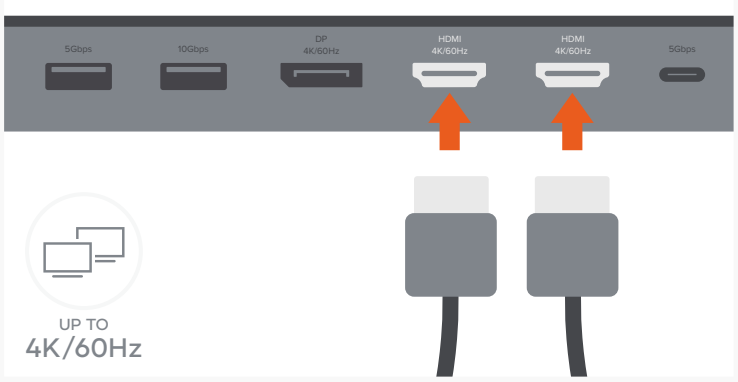


Use HDMI cables to connect up to two HDMI-enabled monitors.
Dual Display not supported on M1/M2 MacBooks

6

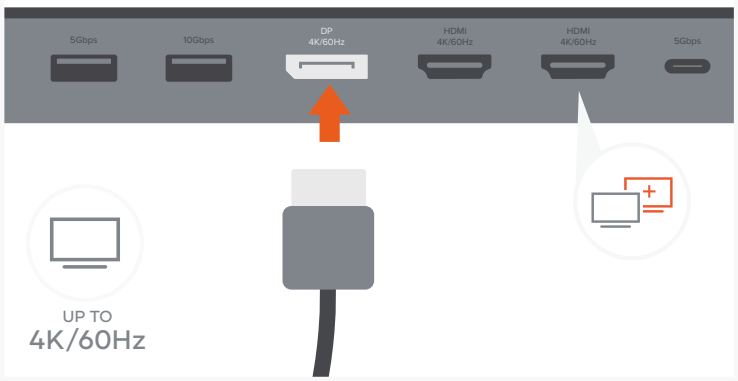


Use DisplayPort cable to connect to a DisplayPort-enabled monitor.
DisplayPort connection supports up to 4K/60Hz. Dual monitors supported when using HDMI port to the left of USB-C data port

7

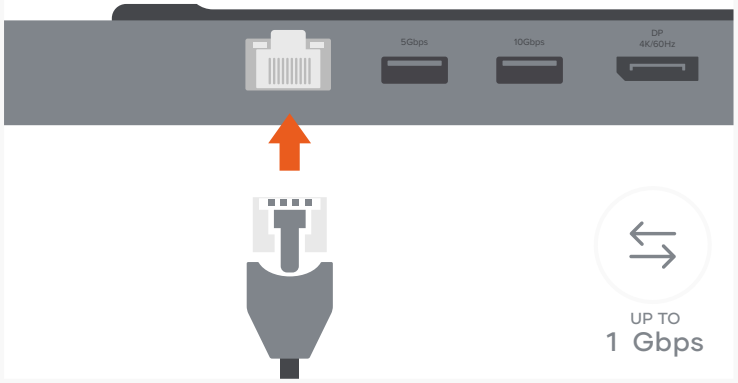


Connect an RJ45 Ethernet cable to the dock's Gigabit Ethernet port.
Up to 1 Gbps

8

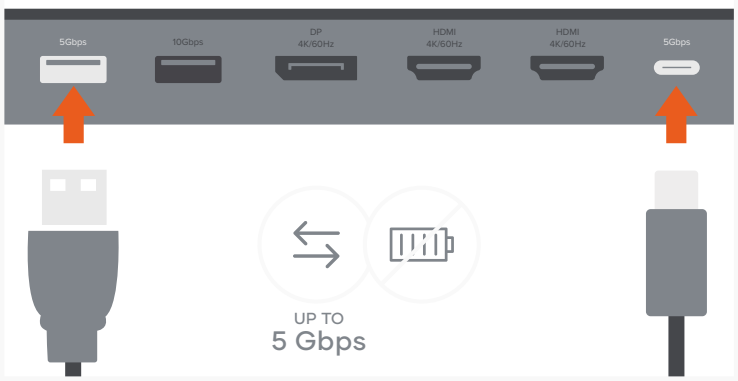

Use the USB-C port and USB-A port for data transfer – up to 5 Gbps each.
Does not support charging or CD readers, including Apple SuperDrive

9

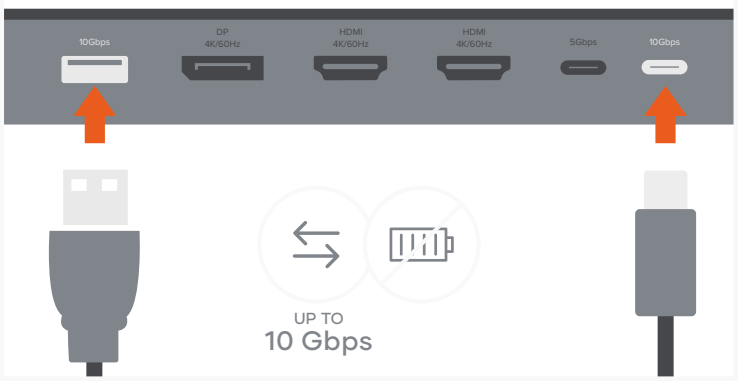


Use the USB-C port and USB-A port for data transfer – up to 10 Gbps each.
Does not support charging or CD readers, including Apple SuperDrive

output

Dock supports only two display ~~outputs~~ maximum.


INSTALLING SSD

1

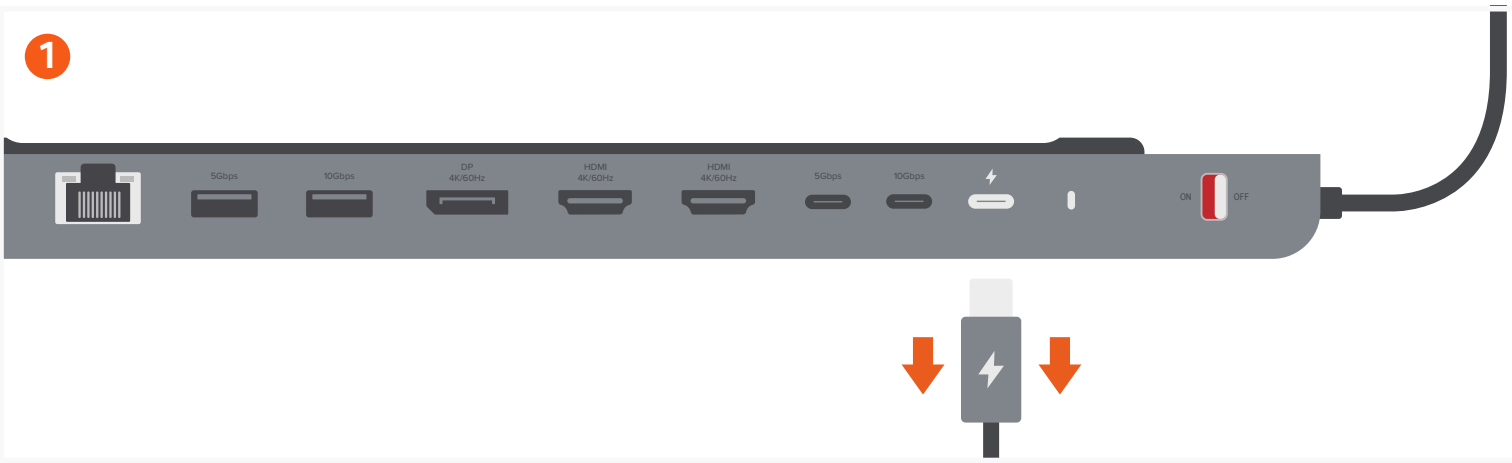


Before installing, ensure the Dual Dock Stand is not connected to power.
Disconnect from host device and disconnect any power delivery cables connected to the Dock

2

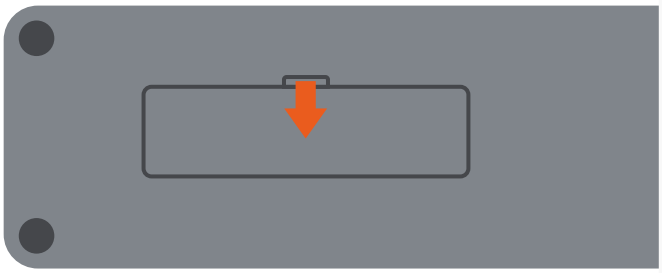


To install the SSD, press and lift the latch on the SSD cover.

3

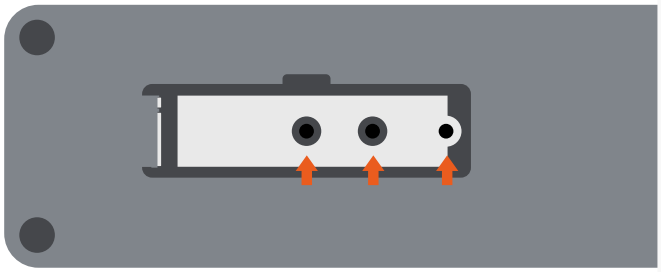


Remove the film from both sides of the included thermal pad and align the holes on the thermal pad with the screw openings.

4

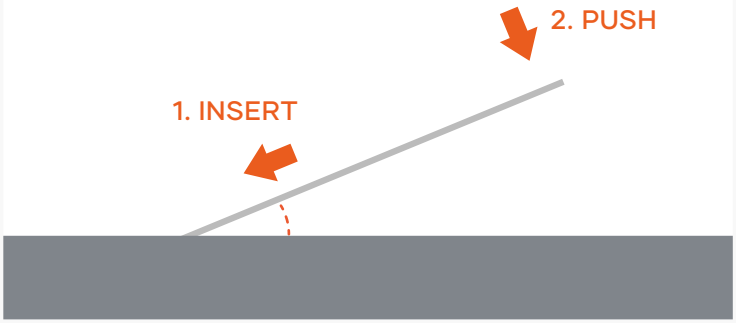


Insert the SSD (not included) at an angle and faceup with the pins aligned and push down to align the SSD with the screw hole.

5

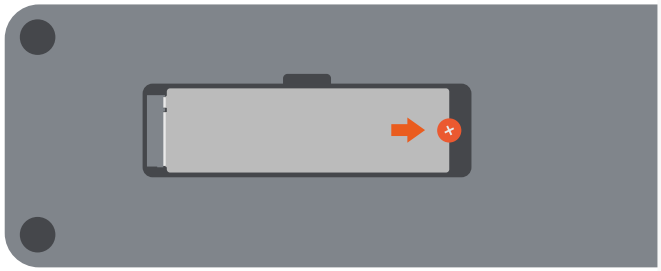


Use the included screw and screwdriver to secure the SSD into place.
To avoid stripping the screw, please do not over tighten.


Not compatible with SSDs with preinstalled heat-sinks.

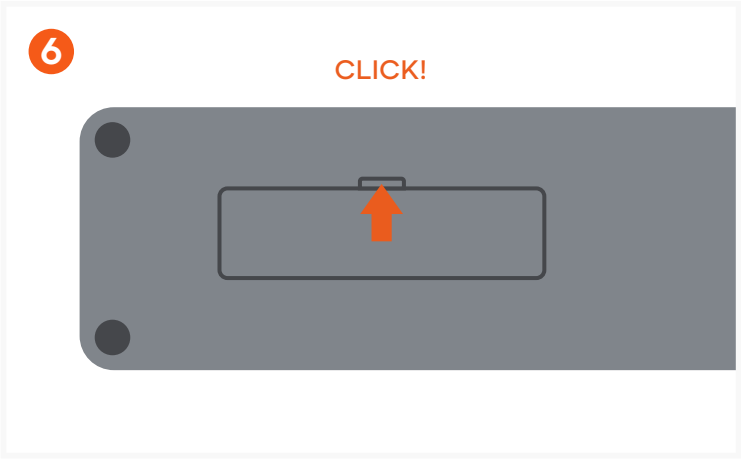


Reinstall the SSD cover. Insert at an angle and press down until it clicks.

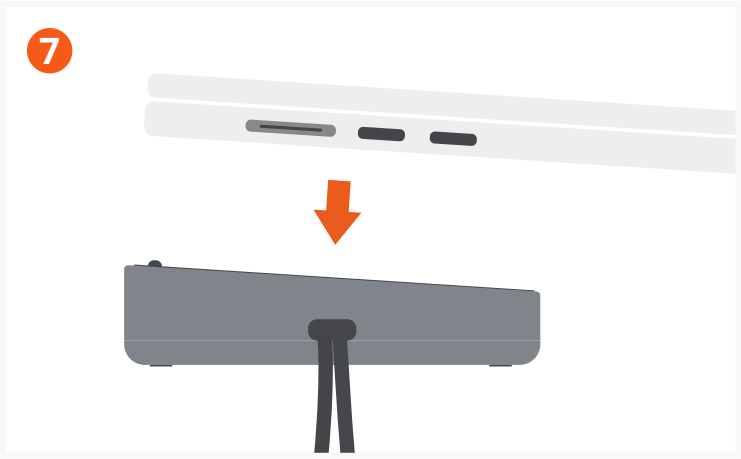


Turn the dock over and place your host device on top of the Dock Stand.

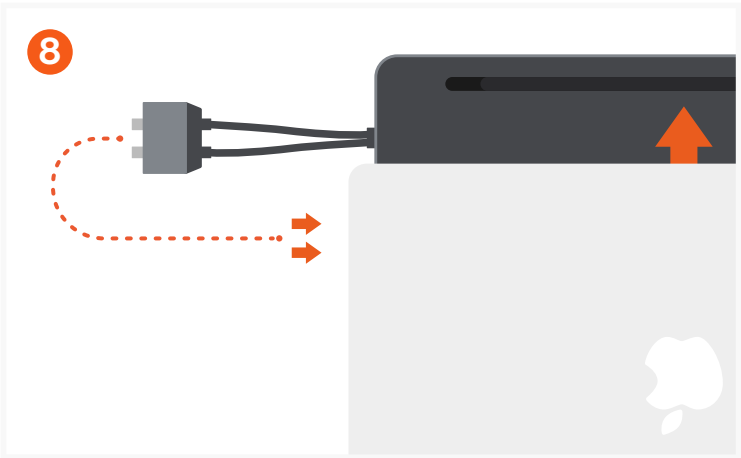

Connect the dual cable connectors to the dual USB-C ports on your host device.
Both cables must be connected in order for full functionality

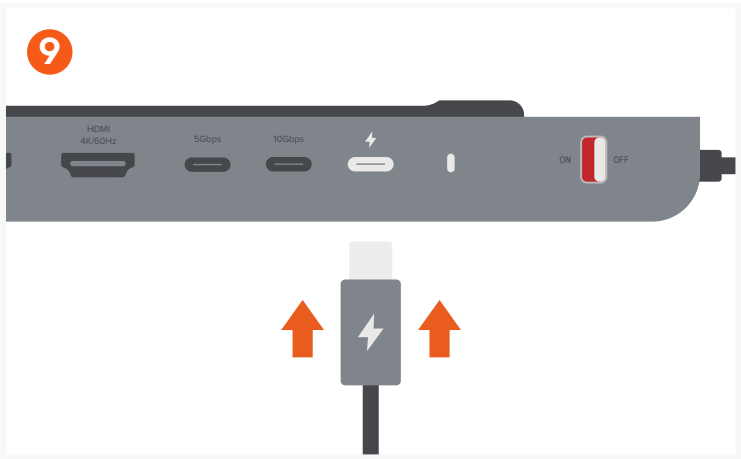

Connect Dual Dock Stand to the power source.

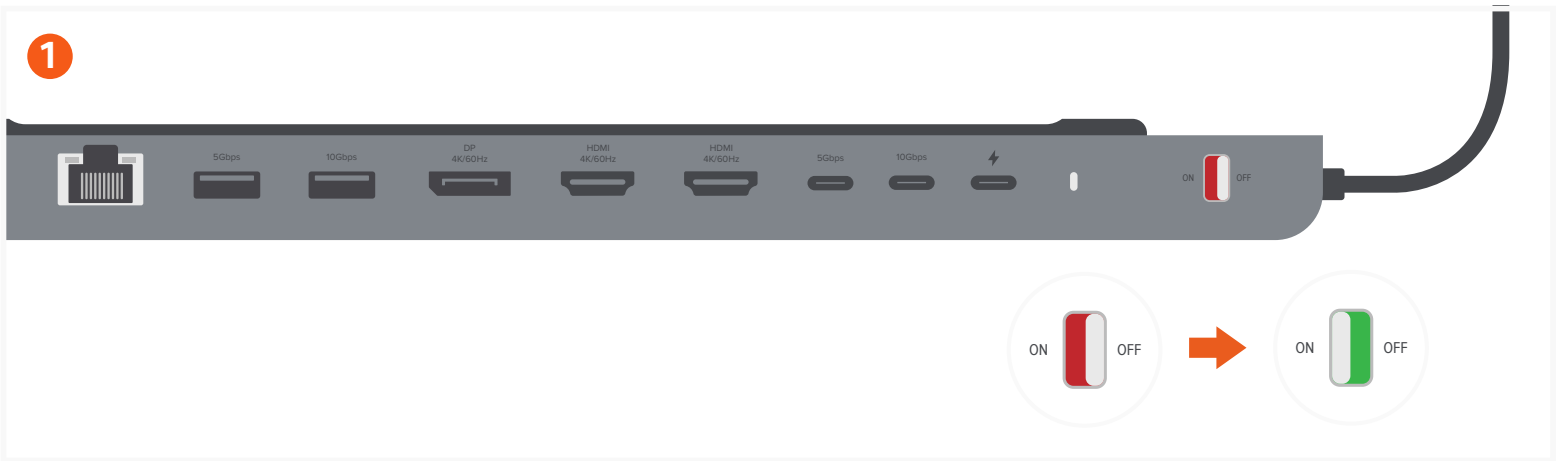

Slide the power switch to the left from red to green in order to turn on the Dock.
White LED will turn on signifying the dock is on

Include instruction to eject any external storage device prior to connecting or disconnecting power to the dock.

If using with a new Solid-State Drive, please ensure the drive is properly formatted to support your host device operating system.