



User Manual

Capella T
Wireless Keyboard

Dear Customer,

Thank you for choosing our products.

We are pleased to offer you appliances and devices designed and manufactured to the highest standards of quality, functionality, and design. Before using the device, please read this manual carefully. It contains important information regarding your safety, as well as recommendations for the proper use and care of the product. Please keep this manual in a safe place and use it as a reference guide during future operation of the product.

Intended Use

The keyboard is an input device designed for typing text and issuing commands to the computer.

Safety Precautions

- Do not make any modifications to the device's design.
- To avoid a short circuit, do not expose the device to any liquids, and do not place open containers of liquid near it.
- Do not expose the device to electromagnetic radiation.
- This device is not intended for commercial use.
- This device is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the device.

Rechargeable Battery Guidelines (Li-pol/Li-ion)

Dear Customer, please note that this device uses a lithium-based rechargeable battery as its power source. Please carefully read the information below to help extend the life of your battery and prevent undesirable consequences during its operation.

- Use only the original charging cable with the device.
- Observe the temperature requirements. Batteries should be stored in a charged state at temperatures between +15°C and +35°C with normal humidity. Batteries do not perform well when operated for extended periods in extremely high (above +40°C) or low (below -10°C) ambient temperatures. Do not leave the battery in direct sunlight.
- Do not disassemble, incinerate, or use batteries that show signs of damage.
- Do not immerse the device in water or use it near water sources.
- Do not touch the device with wet hands.
- Protect the device from drops, impacts, and shaking.
- Rough handling may damage internal contacts and circuit boards.
- Unqualified manipulations with the device (modifications, repairs, self-replacement of the battery, etc.) may harm the device and your health.
- Immediately stop using the device when the battery is fully discharged.

- Do not use the device after it has been dropped, or if there is visible damage, battery swelling, or malfunctions. Contact a service center.
- Fully charge the device before first use. Full performance is achieved only after 2–3 complete charge and discharge cycles.

Specifications


- Model: Capella T.
- Trademark: KEYRON.
- Key mechanism: Scissor-switch.
- Total number of keys: 78.
- Numeric keypad: Yes.
- Power supply: 5 V $\approx$ 180 mA.
- Battery: Li-ion, 500 mA·h.
- Connection interface: Bluetooth, 2.4 G.
- Wireless standard: IEEE 802.15.
- Frequency range: 2400–2483 MHz.
- Transmitter power: < 100 mW.
- Cable length: 1.5 m.
- Dimensions: 281 × 118 × 12 mm.
- Weight: 380 g.
- Scope of application: Domestic.

Package Contents

- Keyboard.
- Type-A – Type-C cable.
- Dongle.
- User manual.



Device Diagram

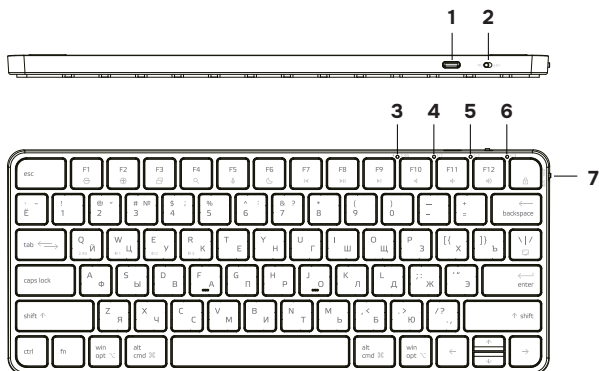

1. USB Type-C connector.
2. Power switch.
3. 2.4G connection indicator.
4. BT1 indicator.
5. BT2 indicator.
6. BT3 indicator.
7. Windows/macOS layout switch.

Operating Instructions

Connecting the Device

2.4G Mode

- Press FN + Q simultaneously to enter 2.4G connection mode. The corresponding indicator will light up white.
- Insert the receiver into a USB connector on your PC. Wait for pairing to complete.
- The device is ready for use.

Bluetooth

- Press FN + W / E / R simultaneously for 1 second to enter Bluetooth connection mode. The white indicator for the corresponding mode will light up (see “Device Diagram”).
- Turn on Bluetooth in your PC/laptop settings.
- Find your device in the list of available devices.
- Wait for pairing to complete. The device is ready for use.

Note: To disconnect, press and hold the corresponding keys for 3 seconds.

Function Keys and Key Combinations

Key Combinations		Function
Windows	MAC	
FN+F1	F1	Brightness -
FN+F2	F2	Brightness +
FN+F3	F3	Task switching
FN+F4	F4	Search
FN+F5	F5 (long press)	Activate microphone
FN+F6	F6	Sleep mode
FN+F7	F7	Previous track
FN+F8	F8	Play/Pause
FN+F9	F9	Next track
FN+F10	F10	Mute
FN+F11	F11	Volume -
FN+F12	F12	Volume +
		Lock screen
 FN+ 	 FN+ 	Screenshot

Notes:

- The functions of the multimedia keys vary depending on the layout.
- Depending on your computer system, some function keys and key combinations may not work.

Description of LED Indicators

Indicator	Function	Description
 2.4G	Low battery / Charging process / 2.4G mode	When the battery is low, the red indicator flashes once per second while typing. The red indicator stays on during charging and turns off when fully charged. When switching to 2.4G mode, the white indicator lights up and then turns off
 1	Bluetooth 1	The indicator flashes white when switching to Bluetooth 1 mode, and the device enters pairing mode On successful pairing, the indicator stays lit. If pairing fails, the keyboard enters standby mode and the indicator turns off

Indicator	Function	Description
LED 2	Bluetooth 2	The indicator flashes white when switching to Bluetooth 2 mode, and the device enters pairing mode On successful pairing, the indicator stays lit If pairing fails, the keyboard enters standby mode and the indicator turns off
LED 3	Bluetooth 3	The indicator flashes white when switching to Bluetooth 3 mode, and the device enters pairing mode On successful pairing, the indicator stays lit If pairing fails, the keyboard enters standby mode and the indicator turns off
Caps Lock	Caps Lock	The indicator lights up when Caps Lock is enabled and turns off when disabled
Num Lock	Num Lock	

Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal

- This device requires no assembly or mounting.
- The device must be stored in its original packaging, on heated premises, both at the manufacturer's and at the consumer's sites. The ambient temperature should be between +5 °C and +40 °C, and the relative humidity should not exceed 80% (non-condensing). The storage area must be free from aggressive contaminants (e.g., acid or alkali vapors) that could cause corrosion.
- The device must be transported in a dry place.
- The device requires careful handling. Protect it from exposure to dust, dirt, impact, moisture, fire, and other hazards.
- Sale or distribution of the device must be carried out in accordance with local legislation.
- Upon expiration of the device's service life, it must not be disposed of with unsorted household waste. Instead, it must be taken to an authorized collection point for electrical and electronic equipment for subsequent recycling and disposal in accordance with federal or local legislation. By ensuring proper disposal of this product, you help conserve natural resources and prevent potential harm to the environment and human health that may result from improper handling. For more detailed information about collection and disposal points for this product, please contact your local municipal authorities or your household waste disposal service.
- If a device malfunction is detected, immediately contact an authorized service center or dispose of the device.

Warranty Information

The manufacturer guarantees the device will function properly throughout the warranty period and be free from defects in materials and assembly. The warranty period commences on the date of purchase and applies to new products only. Warranty service includes free repair or replacement of defective parts that fail during the warranty period, provided the failure is not caused by consumer misuse and the product is operated in accordance with the user manual. Repairs or part replacements shall be performed at authorized service centers.

Warranty Period: 36 months

Service Life: 36 months

For the up-to-date list of authorized service centers, please visit:

<https://www.dns-shop.ru/service-center/>

Additional Information

Manufacturer: Dongguan Mingjian Mould Co., Ltd.

No.11 Fengping Road, Sanzhong Village, Qingxi Town, Dongguan City, China.

Made in China.

The product meets the requirements of the technical regulations of the TR CU (EAEU).

Product specifications, information and appearance are subject to change without prior notice, for quality improvement of our products.

Production date (mm.yyyy):

v.1

