

FURY BEAST

GAMING MOUSE



Contents

Intended Use	3
Safety Precautions	3
Package Contents.....	3
Specifications	4
Device Diagram	5
Operating Instructions	6
Mouse Connection.....	6
Software	6
Polling Rate.....	7
DPI Settings and Indication	7
Backlighting	8
Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal	9
Warranty Information.....	10
Additional Information	10

Wired Mouse ARDOR GAMING Fury Beast

User Manual

Dear Customer,

Thank you for your trust!

Our team fully shares your passion for computer games, which is why we put all our efforts into making your gaming experience unforgettable with our accessories for gamers. Wishing you new victories and the brightest impressions ahead!

Intended Use

The mouse is a device for controlling the cursor and issuing various commands to the computer.

Safety Precautions

- Do not make any modifications to the device design.
- To avoid a short circuit, do not allow the device to come into contact with any liquids, and do not place open containers with liquid near it.
- Do not expose the device to electromagnetic radiation.
- This device is not intended for commercial use.
- This device is not intended for use by children or persons with reduced physical, sensory, or mental capabilities, unless they are supervised by a person responsible for their safety. Do not allow children to play with the device.

Package Contents


- Device
- Spare glides
- User manual

Specifications

- Model: ARD-FURY3327-BEAST-PU
- Trademark: ARDOR GAMING
- Mouse type: Wired
- Optical LED sensor: PixArt PMW3327
- DPI modes: 400 / 800 / 1200 / 2400 (default) / 3200 / 6200 (max. 12 400)
- Max. tracking speed: 220 IPS
- Acceleration: 30 G
- Encoder: F-Switch
- Polling rate: 1000 Hz
- Switches: Huano blue shell
- Switch lifespan: Up to 20 million clicks
- Power supply: 5 V = 100 mA
- Backlighting: RGB
- Material: Plastic
- Cable: USB 2.0, 1.8 m, braided
- Compatibility: Windows
- Mouse dimensions: 131 × 73 × 41 mm
- Weight: 95 g
- Scope of application: Domestic

Device Diagram

1. Left mouse button (Huano 20 M)
2. Right mouse button (Huano 20 M)
3. F-switch encoder
4. Scroll up
5. Middle mouse button
6. Scroll down
7. Forward
8. Backward
9. DPI switch
10. Backlighting mode switch
11. LED logo
12. LED backlighting

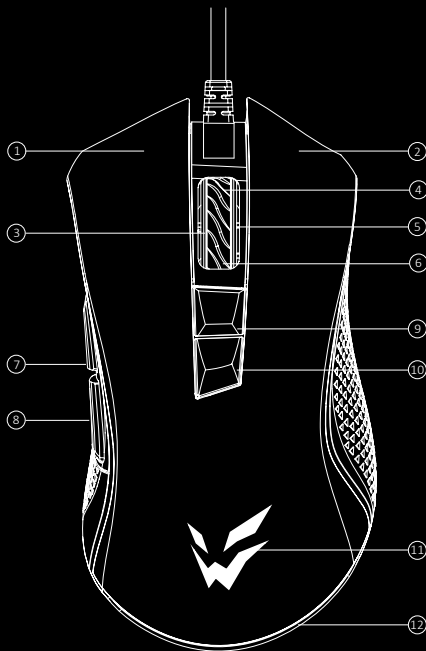

Operating Instructions

Mouse Connection

- Connect the device to the computer's USB port.
- Wait for the computer's hardware installation wizard to complete.
- The device is ready for use.

Note: If the mouse does not connect, ensure it is plugged into the computer's USB port. If it still does not connect after checking, try plugging the cable into a different USB port on the computer.

Software

This device has software that allows you to personalize mouse settings.

- The software can be downloaded from <https://www.dns-shop.ru/> on the product page.
- Before downloading the software, ensure you are downloading it from the correct product card (to do this, enter the alphanumeric model name specified on the box, in the user manual, or on the back of the mouse).
- Using the software, you can remap keys to your desired commands using macros, as well as change default key values.

Note: If the software does not detect the mouse, check if any other software is open on your desktop and close all third-party programs. If more than one mouse is connected to your computer, disconnect the other mouse first.

If there are no open third-party programs and only one mouse is connected, try uninstalling the software, temporarily disable your antivirus protection, download the software again according to the provided instructions, and check the mouse connection to the software. If the above solution does not help, contact technical support.

Polling Rate

The polling rate can be configured using the software. Available values: 125 / 250 / 500 / 1000 Hz.

DPI Settings and Indication

1. DPI levels: 400 / 800 / 1200 / 2400 / 3200 / 6200.
2. Press the «DPI» button on the top side of the mouse to sequentially change the DPI level.
3. The mouse backlighting color will indicate the current DPI level:
 - 400 DPI: Red.
 - 800 DPI: Green.
 - 1200 DPI: Blue.
 - 2400 DPI: Purple.
 - 3200 DPI: Azure.
 - 6200 DPI: White.

Note: DPI can also be adjusted using the software, with a maximum DPI level of 12 400.

Backlighting

- The backlighting can be configured or disabled using the software.
- This model features 12 backlighting modes.
- Static solid colors can be set using the software.

Note: If you need the mouse to have a static solid color backlighting, set the indication of all DPI levels to the same color, so the scroll wheel will always have a uniform color regardless of DPI level changes. Next, go to the backlighting tab, select the «Standard» mode, then in the «Color Setting» section (on the current tab) select the «Full color» mode and choose the backlighting color in the square next to this mode. After that, click the «Apply» button. The mouse will have a uniform static color.

Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal

- This device requires no assembly or mounting.
- The device must be stored in its original packaging, on heated premises, both at the manufacturer's and at the consumer's sites. The ambient temperature should be between +5 °C and +40 °C, and the relative humidity should not exceed 80% (non-condensing). The storage area must be free from aggressive contaminants (e.g., acid or alkali vapors) that could cause corrosion.
- The device must be transported in a dry place.
- The device requires careful handling. Protect it from exposure to dust, dirt, impact, moisture, fire, and other hazards.
- Sale or distribution of the device must be carried out in accordance with local legislation.
- If a device malfunction is detected, immediately contact an authorized service center or dispose of the device.
- Upon expiration of the device's service life, it must not be disposed of with unsorted household waste. Instead, it must be taken to an authorized collection point for electrical and electronic equipment for subsequent recycling and disposal in accordance with federal or local legislation. By ensuring proper disposal of this product, you help conserve natural resources and prevent potential harm to the environment and human health that may result from improper handling. For more detailed information about collection and disposal points for this product, please contact your local municipal authorities or your household waste disposal service.

Warranty Information

The manufacturer guarantees the device will function properly throughout the warranty period and be free from defects in materials and assembly. The warranty period commences on the date of purchase and applies to new products only. Warranty service includes free repair or replacement of defective parts that fail during the warranty period, provided the failure is not caused by consumer misuse and the product is operated in accordance with the user manual. Repairs or part replacements shall be performed at authorized service centers.

Warranty Period: 18 months

Service Life: 24 months

For the up-to-date list of authorized service centers, please visit: <https://www.dns-shop.ru/service-center/>

Additional Information

Manufacturer: Dongguan ShangGui Electronics Co., Ltd.

No.7, 7th Str. Yincheng Road, Xiabian Village, Chang'an Town, Dongguan City, Guangdong Province, China.

Made in China.

The product meets the requirements of the technical regulations of the TR CU (EAEU).

Product specifications, information and appearance are subject to change without prior notice, for quality improvement of our products.

Production date (mm.yyyy): _____ v.1





LEARN MORE:
ARDOR-GAMING.COM
[VK.COM/ARDOR_GAMING](https://vk.com/ardor_gaming)

