

FURY PRO

GAMING MOUSE



Contents

Intended Use	3
Safety Precautions	3
Specifications	4
Package Contents.....	4
Device Diagram	5
Connecting the Mouse	6
Software	6
Polling Rate	7
DPI Settings and Indication	7
Backlight	8
Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal	9
Warranty Information.....	10
Additional Information	10

Wired Mouse ARDOR GAMING Fury PRO

User Manual

Dear Customer,

Thank you for your trust!

Our team fully shares your passion for computer games, which is why we put all our efforts into making your gaming experience unforgettable with our accessories for gamers. Wishing you new victories and the brightest impressions ahead!

Intended Use

The mouse is a device for controlling the cursor and issuing various commands to the computer.

Safety Precautions

- Do not make any modifications to the device's design.
- To prevent short circuits, do not allow the device to come into contact with any liquids, and do not place open containers of liquid near it.
- Do not expose the device to electromagnetic radiation.
- This device is not intended for commercial use.
- This device is not intended for use by children or persons with reduced physical, sensory, or mental capabilities, unless they are supervised by a person responsible for their safety. Do not allow children to play with the device.

Specifications


- Model: ARD-FURY3360-BK
- Trademark: ARDOR GAMING
- Optical LED sensor: PMW3360
- DPI modes: 400 / 800 / 1200 / 2400 / 3200 (min. 100 DPI, max. 12 000 DPI)
- Acceleration: 50 G
- Max tracking speed: 250 IPS
- Polling rate: 1000 Hz
- Switches: Huano blue shell, up to 20 million clicks
- Encoder: F-Switch
- Backlight: RGB
- Material: Plastic
- Cable: Elastic paracord, 1.8 m
- Dimensions: 130 × 73 × 43.5 mm
- Compatibility: Windows 2000/Windows ME/XP/Vista/Win 7/8/10
- Weight: 95 g
- Scope of application: Domestic

Package Contents

- Device
- Replaceable mouse skates
- User manual

Device Diagram

1. Left mouse button (Huano 20M)
2. Right mouse button (Huano 20M)
3. Scroll wheel encoder
4. Scroll up
5. Middle mouse button
6. Scroll down
7. Forward
8. Back
9. DPI increase
10. DPI decrease
11. LED logo
12. LED backlight

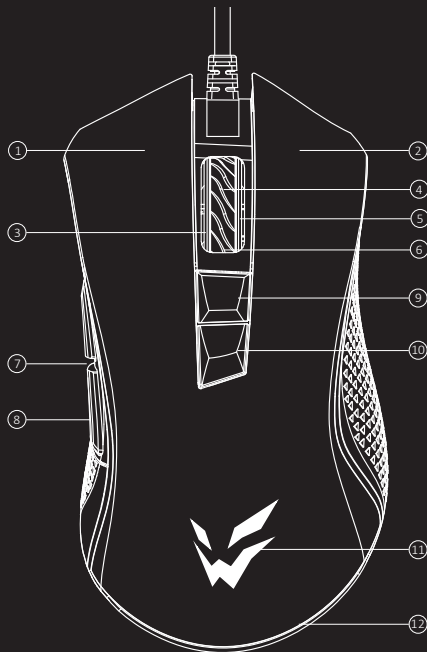

Operating Instructions

Connecting the Mouse

1. Connect the device to a USB port on your computer.
2. Wait for the hardware installation wizard on your computer to finish.
3. The mouse is now ready to use.

Note: If the mouse does not connect, make sure it is plugged into a USB port on your computer. If the mouse still does not connect after checking, try plugging the cable into a different USB port.

Software

This mouse comes with software that lets you personalize its settings.

- The software can be downloaded from <https://www.dns-shop.ru/>, on the product page.
- Before downloading the software, make sure you are downloading it from the correct product page (to do this, enter the alphanumeric model name found on the box, in the manual, and on the back of the mouse).
- Using the software, you can remap buttons to your preferred commands using macros, and change the default button assignments.

Note: If the software does not detect the mouse, check whether any other software is open on your desktop — all third-party software must be closed. If more than one mouse is connected to your computer, disconnect the other mouse first. If no third-party software is open and only one mouse is connected, try uninstalling the software, temporarily disabling your antivirus protection, downloading the software again as described above, and checking the connection between the mouse and the software. If this does not resolve the issue, please contact customer support.

Polling Rate

The polling rate can be configured using the software. Available values: 125/250/500/1000 Hz.

DPI Settings and Indication

1. DPI levels: 400 / 800 / 1200 / 2400 / 3200.
2. Press the «DPI» button on the top of the mouse to cycle through DPI levels.
3. The logo backlight color indicates the current DPI level:
 - 400 DPI — Red.
 - 800 DPI — Green.
 - 1200 DPI — Blue.
 - 2400 DPI — Purple.
 - 3200 DPI — Cyan.

Note: DPI can also be adjusted via the software; the maximum DPI level is 12000.

Backlight

- The backlight can be changed by simultaneously pressing the middle mouse button (scroll wheel) and the «Forward» button for 5 seconds.
- The backlight can also be configured or turned off via the software.
- This model features 12 backlight modes.
- Static single-color lighting can be set via the software.

Note: If you want the mouse to have a static single-color backlight, set all DPI level indicator colors to the same color, so the wheel always shows a single color regardless of DPI level changes. Then go to the backlight tab, select the «Steady» mode, and in the «Color Setting» section (on the current tab), set the same color in each of the four squares. Then click «Apply». The mouse will now display a single static color.

Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal

- This device requires no assembly or mounting.
- The device must be stored in its original packaging, on heated premises, both at the manufacturer's and at the consumer's sites. The ambient temperature should be between +5 °C and +40 °C, and the relative humidity should not exceed 80% (non-condensing). The storage area must be free from aggressive contaminants (e.g., acid or alkali vapors) that could cause corrosion.
- The device must be transported in a dry place.
- The device requires careful handling. Protect it from exposure to dust, dirt, impact, moisture, fire, and other hazards.
- Sale or distribution of the device must be carried out in accordance with local legislation.
- Upon expiration of the device's service life, it must not be disposed of with unsorted household waste. Instead, it must be taken to an authorized collection point for electrical and electronic equipment for subsequent recycling and disposal in accordance with federal or local legislation. By ensuring proper disposal of this product, you help conserve natural resources and prevent potential harm to the environment and human health that may result from improper handling. For more detailed information about collection and disposal points for this product, please contact your local municipal authorities or your household waste disposal service.
- If a device malfunction is detected, immediately contact an authorized service center or dispose of the device.

Warranty Information

The manufacturer guarantees the device will function properly throughout the warranty period and be free from defects in materials and assembly. The warranty period commences on the date of purchase and applies to new products only. Warranty service includes free repair or replacement of defective parts that fail during the warranty period, provided the failure is not caused by consumer misuse and the product is operated in accordance with the user manual. Repairs or part replacements shall be performed at authorized service centers.

Warranty Period: 18 months

Service Life: 24 months

For the up-to-date list of authorized service centers, please visit: <https://www.dns-shop.ru/service-center/>

Additional Information

Manufacturer: Dongguan ShangGui Electronics Co., Ltd.

No.7, 7th Str. Yincheng Road, Xiabian Village, Chang'an Town, Dongguan City, Guangdong Province, China.

Made in China.

The product meets the requirements of the technical regulations of the TR CU (EAEU).

Product specifications, information and appearance are subject to change without prior notice, for quality improvement of our products.

Production date (mm.yyyy): _____ v.1





LEARN MORE:
ARDOR-GAMING.COM
[VK.COM/ARDOR_GAMING](https://vk.com/ardor_gaming)

