

aceline

User Manual

Contents

Intended Use.....	3
Safety Precautions	3
Rechargeable Battery Guidelines (Li-pol/Li-ion)	4
Device Diagram	5
Operating Instructions.....	6
Bluetooth Pairing	6
Main Functions.....	6
Call Control.....	7
Charging the Case	7
Charging the Headset	7
Charging Case LED Indicators	9
Specifications	10
Package Contents.....	10
Troubleshooting Guide.....	11
Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal	14
Warranty Information.....	15
Additional Information	16

TWS Headset Aceline LightPods Basic W

Dear Customer,

Thank you for choosing our products.

We are pleased to offer you appliances and devices designed and manufactured to the highest standards of quality, functionality, and design. Before using the device, please read this manual carefully. It contains important information regarding your safety, as well as recommendations for the proper use and care of the product. Please keep this manual in a safe place and use it as a reference guide during future operation of the product.

Intended Use

The TWS headset features Bluetooth wireless technology and is designed for personal listening to music, speech, or other audio signals, as well as for voice communication.

Safety Precautions

- Do not expose the device to excessively high/low temperatures, dust, humidity, direct sunlight, strong vibration, or strong electromagnetic radiation.
- Avoid spilling liquid on the device. Do not use the device in areas where there is a risk of it falling into water (e.g., swimming pools, bodies of water, bathtubs, etc.).


- The manufacturer does not guarantee full compatibility of the device with any third-party applications or the correct operation of these applications.
- Avoid dropping the device from heights or subjecting it to impacts against hard surfaces.
- Prolonged use of headphones at excessively high volume may cause hearing loss.
- Please note that the battery reaches its maximum performance after two to three full charge and discharge cycles.
- Use only manufacturer-approved chargers and accessories. Using other accessories voids the warranty and may be dangerous.
- Use a soft cotton cloth to clean the device body. Do not use chemical substances, as they may damage the device.
- This device is not intended for commercial use.
- This device is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the device.

Rechargeable Battery Guidelines (Li-pol/Li-ion)

- Use only the original charging cable with the device.
- Observe the temperature requirements. Batteries should be stored in a charged state at temperatures between +15°C and +35°C with normal humidity. Batteries do not perform well when operated for extended periods in extremely high (above +40°C) or low (below -10°C) ambient temperatures. Do not leave the battery in direct sunlight.

- Do not disassemble, incinerate, or use batteries that show signs of damage.

Device Diagram

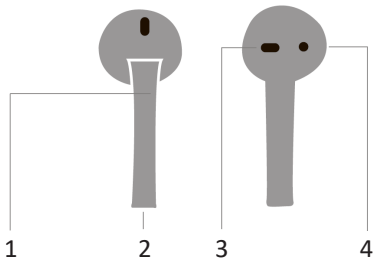

1. Touch sensor.
2. Charging contact.
3. Left speaker.
4. Right speaker.

Operating Instructions

Bluetooth Pairing

1. Open the charging case lid.
2. Activate Bluetooth on your source device.
3. From the list of available devices for pairing, select “LightPods” and follow the on-screen prompts.
4. If you cannot find “LightPods” in the device list, press and hold the button on the back of the case for 8 seconds.
5. To clear the connection history and start pairing with a new device, open the charging case lid, press and hold the button on the back of the case for 8 seconds.

Notes:

- After successfully pairing both earbuds with your smartphone, you can place one back in the charging case and use a single earbud.
- When the headset is turned on next time, it will automatically connect to the last paired device within 8 seconds.
- If Bluetooth connection fails within 3 minutes, the device will automatically turn off.

Main Functions

1. Power on: Open the charging case lid. The earbuds will automatically connect to each other, and then the primary earbud will enter pairing mode.
Note: The left earbud is the primary earbud by default.
2. Power off: Place the earbuds back into the charging case and close the lid.
3. Play/Pause: Tap either earbud once.

4. Previous track: Double-tap the right earbud.
5. Next track: Double-tap the left earbud.
6. Decrease volume: Triple-tap the right earbud.
7. Increase volume: Triple-tap the left earbud.
8. Turn on/off Siri/Google voice assistant: Tap and hold either earbud for 3 seconds.

Call Control

1. Answer a call: Tap either earbud once.
2. Reject a call: Double-tap either earbud.
3. Hold/resume a call: Tap either earbud once.
4. End a call: Double-tap either earbud.

Charging the Case

The case can be charged in two ways: using the cable included in the package or via a wireless charger.

1. Fully charge the case before first use.
2. Connect the charging case to a power source using the cable included in the package.
3. While charging, the indicator lights up orange for a few seconds, then turns off. Once charging is complete, it lights up green for 10 seconds, then turns off. The full charging cycle takes about 1.5 hours.
4. After charging is complete, disconnect the device from the power source.

Charging the Headset

1. Fully charge the headset before first use.

2. Place the headset in the charging case, ensuring a secure connection between the headset's charging connectors and the case's contacts.

Note: Use only the original charging adapter.

3. The headset will start charging automatically. The full charging cycle takes about 60 minutes.

Charging Case LED Indicators

Status	Indication
Opening the lid	The indicator lights up green for a few seconds when the battery is fully charged
	The indicator lights up orange for a few seconds when the battery level is low (up to 20%)
	The indicator flashes orange when the battery is depleted (10%)
Closing the lid	The indicator lights up green for a few seconds when the battery is fully charged
	The indicator lights up orange for a few seconds when the battery level is low (up to 20%)
	The indicator turns off when the battery is depleted (10%)

Specifications

- Model: LightPods Basic W.
- Trademark: Aceline.
- Power supply: 5 V.
- Operating voltage: 3.7 V.
- Radio transmitting device: Bluetooth.
- Bluetooth version: 5.0.
- Bluetooth range: Up to 10 m.
- Bluetooth profiles: HSP, HFP, A2DP, AVRCP.
- Wireless standard: IEEE 802.15.1.
- Bluetooth frequency range: 2408–2483.5 MHz.
- Transmitter power: 6 dBm.
- Frequency range: 20 Hz — 20 kHz.
- Sensitivity: 107 ± 3 dB.
- Headset battery capacity: 25 mA·h.
- Case battery capacity: 300 mA·h.
- Playback time: up to 3 hours.
- Headset charging time from the case: up to 1 hour.
- Number of headset charging cycles: up to 3.
- Case charging time: up to 1.5 hours.
- Scope of application: Domestic.

Package Contents

- Headset.
- User manual.

Troubleshooting Guide

Issue	Possible cause	Solution
Earbud desynchronization, unstable operation	A connection failure occurred when connecting the earbuds to the smartphone or to each other. Alternatively, the smartphone runs Android 10 or later	Try reconnecting your earbuds to the smartphone
		Reset your earbuds according to the instructions, after removing them from the Bluetooth device list on your smartphone
		If your smartphone has an extensive list of previously connected Bluetooth devices, remove the unused ones
		Check the Android version on your device. Some smartphones with Android 10 and later may have an unstable connection with the earbuds

Issue	Possible cause	Solution
One or both earbuds are not charging	The protective film has not been removed from the charging contacts, or the contacts are dirty. Alternatively, the charging cable is incorrectly connected to the charging case	Check the case for charge. Check the earbuds for protective stickers on the charging contacts. Remove the protective film. Charge the earbuds in the case. Ensure the charger is properly connected to the charging case. Wipe the charging contacts with a dry cloth and try charging the battery again

Issue	Possible cause	Solution
Audio Interruption During Use	Weak signal level	Signal level decreases outdoors, so place the phone as close to the earbuds as possible
		Do not block the signal source with other objects. Do not put your smartphone deep inside a bag
		If carrying your smartphone in your pocket, place it with the screen facing you. The antennas are located on the back, covering them may weaken the signal
		Using a case for your smartphone can weaken the signal level
		Simultaneous use of Wi-Fi and Bluetooth may affect connection stability. Turn off Wi-Fi if possible

Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal

- This device requires no assembly or mounting.
- The device must be stored in its original packaging, on heated premises, both at the manufacturer's and at the consumer's sites. The ambient temperature should be between +5 °C and +40 °C, and the relative humidity should not exceed 80% (non-condensing). The storage area must be free from aggressive contaminants (e.g., acid or alkali vapors) that could cause corrosion.
- The device must be transported in a dry place.
- The device requires careful handling. Protect it from exposure to dust, dirt, impact, moisture, fire, and other hazards.
- Sale or distribution of the device must be carried out in accordance with local legislation.
- Upon expiration of the device's service life, it must not be disposed of with unsorted household waste. Instead, it must be taken to an authorized collection point for electrical and electronic equipment for subsequent recycling and disposal in accordance with federal or local legislation. By ensuring proper disposal of this product, you help conserve natural resources and prevent potential harm to the environment and human health that may result from improper handling. For more detailed information about collection and disposal points for this product, please contact your local municipal authorities or your household waste disposal service.
- If a device malfunction is detected, immediately contact an authorized service center or dispose of the device.

Warranty Information

The manufacturer guarantees the device will function properly throughout the warranty period and be free from defects in materials and assembly. The warranty period commences on the date of purchase and applies to new products only. Warranty service includes free repair or replacement of defective parts that fail during the warranty period, provided the failure is not caused by consumer misuse and the product is operated in accordance with the user manual. Repairs or part replacements shall be performed at authorized service centers.

Warranty Period: 12 months.

Service Life: 24 months.

For the up-to-date list of authorized service centers, please visit:

<https://www.dns-shop.ru/service-center/>

Additional Information

Manufacturer: DONGGUAN SHINECON INDUSTRIAL CO.,LTD. ROOM 201, BUILDING 3, NO.33 SHIBEI ROAD, TANGLI DISTRICT, FENGANG, DONGGUAN, GUANGDONG, P.R.CHINA.

Made in China.

The product meets the requirements of the technical regulations of the TR CU (EAEU).

Product specifications, information and appearance are subject to change without prior notice, for quality improvement of our products.

Production date (mm.yyyy): _____ V.1



aceline