



Safety Instructions


When using the toothbrush for the first time, it is common for the gums to experience itching or slight bleeding, which can be attributed to the fact that your gums have not yet adapted to the efficient cleaning of an electric toothbrush. It is recommended to start with the gentle mode. The conditions will typically be resolved within a period of one to two weeks. In the event that they persist for more than two weeks, please stop using the toothbrush immediately and seek medical assistance.

⚠ WARNINGS:

- The plug must be removed from the socket-outlet before cleaning or maintaining the appliance.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- Do not expose the appliance or battery to excessive temperatures.
- Be aware of the risk of terminals of the battery-operated appliance or battery being short circuited by metal objects.
- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
- Cleaning and user maintenance shall not be made by children without supervision.
- This appliance contains a battery that are non-replaceable.
- Use only with <A520-050100U-EU1> battery charger.
- Only charge and use the appliance at a temperature between 5°C and 35°C.
- The appliance is only to be used with the power supply unit provided with the appliance.

Note: Illustrations of product, accessories, and user interface in the user manual are for reference purposes only. Actual product and functions may vary due to product enhancements.


Product Overview

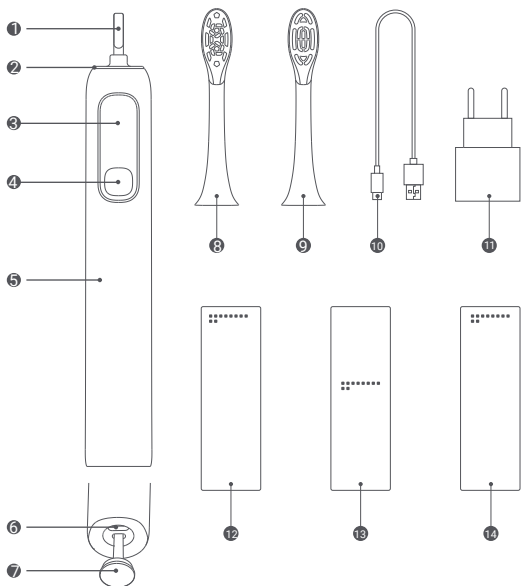

- ① Shaft
- ② Overpressure Notification Indicator
- ③ Display
- ④ Power Button
- ⑤ Toothbrush Handle
- ⑥ Charging Port
- ⑦ Rubber Plug
- ⑧ Toothbrush Head (Clean)
- ⑨ Toothbrush Head (Soft)
- ⑩ Power Adapter
- ⑪ Type-C Charging Cable
- ⑫ Quick Start Guide
- ⑬ User Manual
- ⑭ Warranty Notice


Installing the Toothbrush Head

Keep the bristle direction of the toothbrush head in the same direction as the front of the toothbrush handle, align downwards to install the toothbrush head on the handle, and make sure there is a slight gap between the toothbrush head and the handle (The gap is designed to prevent the toothbrush head from colliding with the handle during high-frequency vibration, so as to generate more power from the motor).

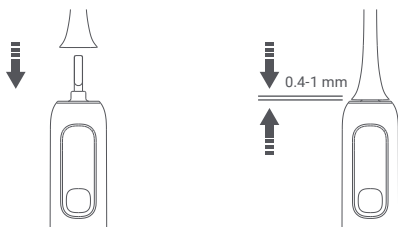


How to Use

Turning on/turning off/switching modes

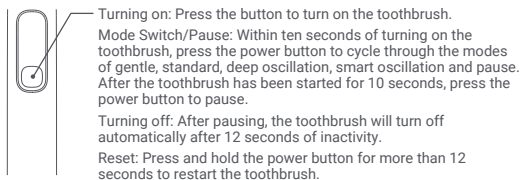

Pick-up-to-wake

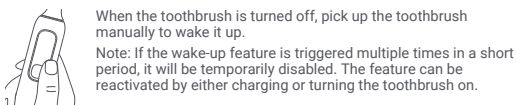

Mode introduction



Gentle: Suitable for beginners and users with sensitive gums.

Standard: Suitable for users for daily oral hygiene.

Deep oscillation: Suitable for deep cleaning of blind spots such as interdental spaces.

Smart oscillation: Suitable for cleaning different tooth surfaces.


Notes:

- It is recommended to start with the gentle mode for new users.
- When the toothbrush is turned on, there is a 3-second gradual power increase function, and the vibration will gradually increase within 3 seconds.


Healthy brushing

For better brushing effect, it is recommended to use the Bass brushing method, gently moving the toothbrush with the bristles positioned at a 45° angle towards the gum line.

CAUTION: The toothbrush pauses briefly every 30 seconds to prompt the user to change the brushing area.

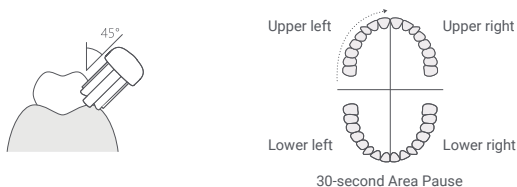

Overpressure Notification Indicator

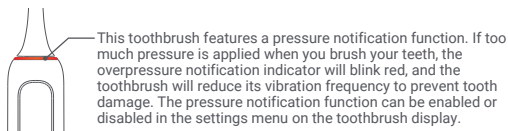

Care & Maintenance

Cleaning the toothbrush head

1. After brushing teeth, rinse the toothbrush head with running water.
2. After rinsing, shake off water and place the toothbrush head in a dry and well-ventilated area to allow for air drying.

* Dentists recommend replacing the toothbrush head every three months.



Warning: Toothpaste should never get on the body of the toothbrush; if this happens, immediately wash the entire body of the toothbrush under a gentle stream of running water at room temperature and then dry the entire body of the brush with a soft cloth.

Intelligent Interaction Interface

Near-term Risk Evaluation

The system's built-in algorithm can analyze recent brushing behavior. After the toothbrush is woken up, the display will show recent brushing information to help users find oral problems in time.

Notes:

- Near-term risk evaluation will be displayed based on actual brushing situations, and will not be shown for the first use.
- Dental plaque risk results are calculated based on recent brushing coverage, brushing intervals and other factors, and are for reference only.



Near-term Dental Plaque Risk




Last Brushing Coverage



Recent Brushing Pressure

Missed Area Reminder

The display will provide feedback on the current brushing situation through missed area identification after brushing is paused or completed, with the cleaned areas displayed in white and the missed areas displayed in orange.



Notes:

- You can achieve better coverage by continuing to brush the orange areas.
- The duration of supplemental brushing varies depending on the areas missed during brushing. Once all the missed areas are brushed, the toothbrush will automatically pause and display the brushing results.
- To achieve relatively accurate brushing results, it is recommended to maintain a stable head position and keep your gaze fixed straight ahead during the brushing process.




Resume



Brushing Result Display

The display will show the results of this brushing, including brushing coverage, brushing evaluation, brushing duration, etc. when brushing is paused or completed.

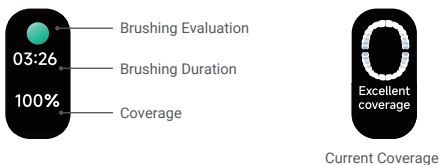

Feature Settings Interface

When the toothbrush is paused or woken up, press and hold the power button for three seconds to enter the settings and set related functions. Press and hold the power button for three seconds to select related functions, press and hold again for three seconds to enter the function settings interface, and press to switch the selection.



Note: The illustrations are schematic diagrams and subject to the actual display.

Charging

Charging method

Open the rubber plug, make sure the charging port is dry, then insert the charging cable and connect it to power.

Caution: Please place the product in a stable and dry place for charging.

Battery Status Information

Toothbrush Status	Battery Level	Screen Display
Operating	20%-100%	None
	5%-20%	Low Battery Level (Turning on possible)
	< 5%	Low Battery Level (Turning on impossible)
Charging	0-100%	The battery level is displayed for the first 20 seconds after charging, and then goes out.

Notes:

- It takes about six hours to get the toothbrush fully charged once its battery is depleted.
- The electrical installation containing the socket into which you want to plug the electric toothbrush must comply with the applicable standards and laws of the country and must undergo regular inspections, and surge protection must also be provided.

Moisture detection of charging port

When connecting the charging cable to the electric toothbrush, if the display shows that the charging port is damp, it indicates the presence of liquid at the charging port. Please ensure the charging port is dry before charging, as it poses a risk of short-circuiting if wet.



Unplug the charging cable

If there is any liquid present at the charging port, proceed with the following cleaning steps:

1. Unplug the charging cable.
2. Keep the charging port downwards and shake gently to drain excess liquid.
3. Place the toothbrush and the charging cable in a dry and well-ventilated place for air drying. Once the toothbrush is completely dry, try to recharge it. If the display still shows that the charging port is damp, it is recommended to extend the drying period until normal charging resumes.



CAUTION: Please do not use paper towels, cotton swabs, etc. to dry the charging port to avoid foreign objects from entering.

Environmental Protection

When the toothbrush reaches the end of its service life, please remove, dispose of and recycle the built-in battery according to local laws and regulations of the country or region where the product is used. If the battery cannot be removed, dispose of it in strict accordance with the regulations on classified domestic waste disposal in your area.

⚠ WARNINGS:

- Do not expose the battery to fire to prevent the battery from exploding or releasing toxic and hazardous substances.
- Do not short-circuit the battery to prevent it from combusting and causing a fire.
- Do not disassemble the toothbrush unless you want to dispose of it; otherwise, the toothbrush will be damaged.
- Before disposing of the toothbrush, remove the battery first.
- The battery must be removed from the appliance before it is scrapped.
- The appliance must be disconnected from the supply mains when removing the battery.
- The battery is to be disposed of safely.

Troubleshooting

Issues	Possible causes	Solutions
The toothbrush does not turn on.	The toothbrush is charging.	Unplug the charging cable from the toothbrush.
	The battery level is too low.	Charge the battery in a timely manner.
	The ambient temperature is too high or too low.	Please use it in room-temperature environment.
	System crashed.	Press and hold the power button for more than 12 seconds to restart the toothbrush.
The toothbrush head cannot be installed.	There are foreign objects inside the toothbrush head.	Remove foreign objects.
	There are foreign objects on the shaft.	Remove foreign objects.
	Non-genuine toothbrush head is used.	Replace with a genuine toothbrush head.
The toothbrush head vibration is weak.	The toothbrush head is not installed in place.	Reinstall the toothbrush head.
	There is something stuck between the toothbrush head and the handle.	Detach the toothbrush head and remove the foreign objects.
The display shows that the charging port is damp during charging.	There is moisture at the charging port.	Unplug the charging cable from the toothbrush, then air dry or wipe the charging port.

Specifications

Name: Electric Toothbrush	Model: MES610
Rated Power: 2.5 W	Rated Input: 5 V=1 A
Charging Time: Approx. 6 hours	IP Rating: IPX8
Power Consumption Off Mode: ≤ 0.3 W	
Time To Enter the Condition Off Mode: ≤ 20 min	

Power Adapter

Input: 100–240 V~, 50/60 Hz, 0.2 A Output: 5.0 V \square 1.0 A, 5.0 W

Information Published	Value and Precision	Unit
Manufacturer's Name	Jiangxi Jian Aohai Technology Co., Ltd.	—
Model Identifier	A520-050100U-EU1	—
Input Voltage	100–240	V~
Input AC Frequency	50/60	Hz
Output Voltage	5.0	V \square
Output Current	1.0	A
Output Power	5.0	W
Average Active Efficiency	73.77	%
Efficiency at Low Load (10%)	64.588	%
No-load Power Consumption	0.075	W



We, Xiaomi Communications Co., Ltd., hereby declare that this equipment is in compliance with the applicable Directives and European Norms, and amendments. The full text of the EU declaration of conformity is available at the following internet address:

<http://www.mi.com/global/service/support/declaration.html>

For detailed e-manual, please go to www.mi.com/global/support/user-guide



WEEE Disposal and Recycling Information

All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive 2012/19/EU) which should not be mixed with unsorted household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

Importer:
Beryko s.r.o.
Pod Vinicemi 931/2, 301 00 Plzeň
www.beryko.cz

EU REP.
Xiaomi Technology Netherlands B.V.
Prinses Beatrixlaan 582, 2595BM, The Hague, The Netherlands
contact@support.mi.com

Manufacturer: Xiaomi Communications Co., Ltd.
Address: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road,
Haidian District, Beijing, 100085, China
For further information, please go to www.mi.com
User Manual Version: V1.0
Made in China

