

User Manual

Speakers 2.0
BHS-200

Fiero

Contents

Intended Use	3
Safety Precautions.....	3
Specifications	4
Package Contents	4
Device Diagram	5
Control and Connection Panel Diagrams.....	5
Cable Connection Diagram	7
Control Remote	8
Operating Instructions	9
Connecting the Speakers to a Power Source.....	9
Connecting the Speakers to an External Device.....	9
Connecting External Devices	9
Connecting a USB Drive.....	9
Connecting Devices via Bluetooth	9
Troubleshooting Guide	10
The device does not turn on	10
No sound.....	10
The remote control does not work.....	10
Cannot find the Bluetooth name of this device on my Bluetooth device	10
Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal	11
Warranty Information	12
Additional Information.....	12

Dear Customer,

Thank you for choosing our products.

We are pleased to offer you appliances and devices designed and manufactured to the highest standards of quality, functionality, and design. Before using the device, please read this manual carefully. It contains important information regarding your safety, as well as recommendations for the proper use and care of the product. Please keep this manual in a safe place and use it as a reference guide during future operation of the product.

Intended Use

Audio speakers are sound reproduction devices designed to connect to a personal computer, laptop, or other devices serving as an audio source, provided that the appropriate audio jacks are available.

Safety Precautions

- Do not disassemble the device yourself to avoid electric shock. This device contains no user-serviceable parts. Maintenance and repairs should only be performed by qualified technicians at an authorized service center.
- Always disconnect the device from the power source during an extended period of non-use.
- Always turn off the device before unplugging it. To disconnect, grasp the plug — do not pull the cord itself.
- Do not touch the device with wet hands.
- Protect the device from foreign objects entering the housing or any openings. Ensure that needles, pins, coins, other small items, and insects do not get inside the device.
- Protect the device from moisture, dust, and extreme temperatures.
- Do not use the device near sources of water or other liquids. Never place the device under running water or immerse it in water.
- Do not install the device in areas with high humidity or dust. Do not place containers with liquids (vases, glasses, bottles, etc.) on or near the device.
- Protect the device from overheating. Do not place it near powerful heat sources (heating appliances, etc.) or expose it to direct sunlight.
- Do not use benzene-based substances, alcohols, or solvents to clean the device, as they may damage the device and its painted surfaces. To clean the device, use only a soft, dry cloth.
- Use the device only for its intended purpose.
- To avoid damage and electric shock, use only undamaged connectors for connection.
- Do not use the device if visible damage is detected. Unplug it immediately and contact an authorized service center.
- This device is not intended for commercial use.
- This device is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge,

unless they have been given supervision or instruction concerning use of appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the device.


Specifications

- Model: BHS-200.
- Trademark: Fiero.
- System format: 2.0.
- Total output power: 60 W.
- Power supply (speakers): 19 V = 1.89 A.
- Power supply (adapter):
 - Input: 100–240 V, 50 Hz.
 - Output: 19 V = 1.89 A.
- Frequency range: 40 Hz — 20 Hz.
- Signal-to-noise ratio: ≥ 80 dB.
- THD: $< 0,5\%$.
- Impedance: 4 Ω .
- Bluetooth version: 5.0.
- Wireless standard: IEEE 802.15.1.
- Bluetooth frequency range: 2400–2483.5 MHz.
- Bluetooth transmitter power: 9 dBm.
- Bluetooth range: 10 m.
- Power cord length: 150 cm.
- Audio cable length: 150 cm.
- Speaker cable length: 180 cm.
- Driver diameter: 100 mm.
- Protection class (device): II.
- Protection class (adapter): II.
- Cord type: X.
- IP code: IPX0.
- Scope of application: Domestic.

Package Contents

- 2.0 speakers.
- 2RCA – 2RCA cable.
- 2RCA – 3.5 mm jack cable.
- Speaker cable.
- Optical cable.
- Power adapter.
- Remote control.
- User manual.


Device Diagram

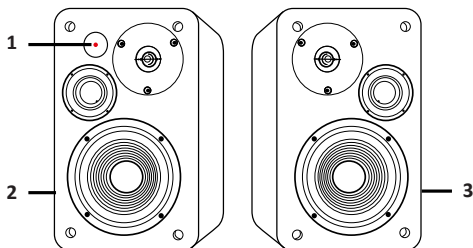


1. Infrared receiver.
2. Right speaker.
3. Left speaker.

Control and Connection Panel Diagrams


4. USB connector.
5. LED indicator:
 - Light blue: RCA – 3.5mm.
 - Orange: 2RCA – 2RCA.
 - Blue: Bluetooth mode.
 - White: Optical mode.
 - Purple: USB mode.
6. Volume control / Source selection button (Bluetooth, Optical, RCA – 3.5 mm, 2RCA – 2RCA, USB).
7. Treble control.
8. Bass control.

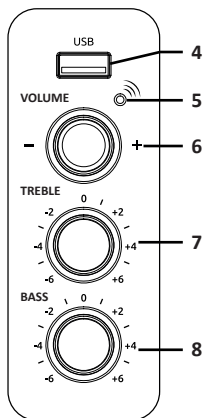

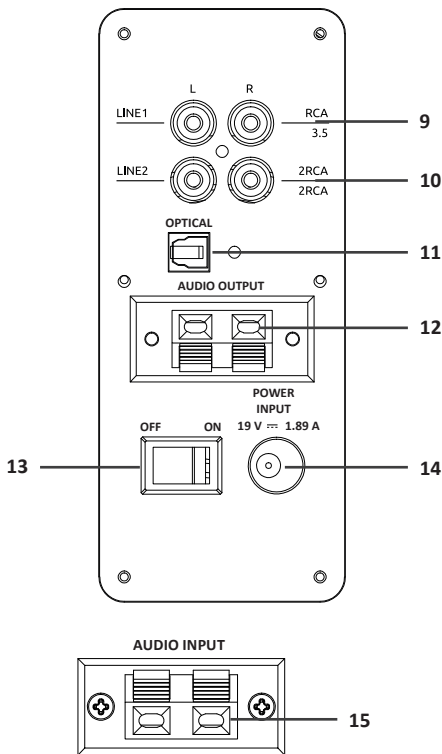


- 9. RCA – 3.5mm connector.
- 10. 2RCA – 2RCA connector.
- 11. Optical connector.
- 12. Right speaker audio output.
- 13. On/Off button.
- 14. Power connector.
- 15. Left speaker audio input.

Cable Connection Diagram

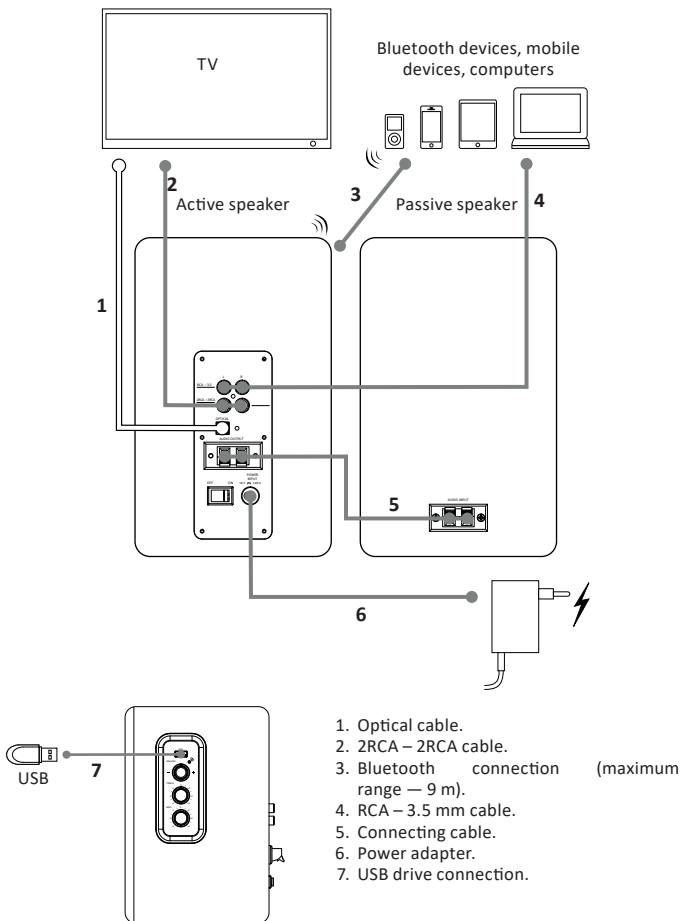

Control Remote

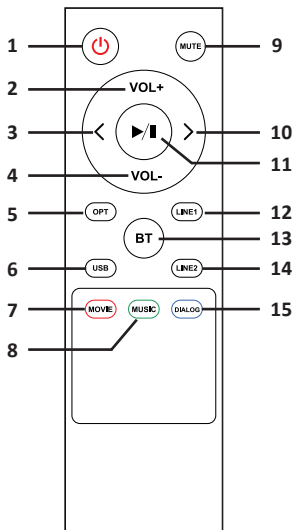

1. On/Off button.
2. Volume up.
3. Previous track.
4. Volume down.
5. Signal source — Optical cable.
6. Signal source — USB drive.
7. Sound mode — Movie.
8. Sound mode — Music.
9. Mute mode.
10. Next track.
11. Pause / Play.
12. Signal source — RCA — 3.5 mm cable.
13. Signal source — Bluetooth.
14. Signal source — 2RCA — 2RCA cable.
15. Sound mode — Dialogue.

Operating Instructions

Connecting the Speakers to a Power Source

Use the power adapter to connect to the power source.

Connecting the Speakers to an External Device

Using RCA – 3.5 mm and 2RCA – 2RCA Cables

1. Connect the cable to the RCA connectors on the speakers, then to the 3.5 mm jack on the external device.
2. Press the source selection button until the indicator turns light blue/orange, or press the “LINE1” / “LINE2” button on the remote control.

Using an Optical Cable

1. Connect the optical cable to the corresponding connector on the speaker, then to the external device.
2. Press the source selection button until the indicator lights up white, or press the “OPT” button on the remote control.

Connecting External Devices

1. Connect the cable to the RCA connectors on the speakers, then to the 3.5 mm jack on the external device.
2. Press the source selection button until the indicator lights up yellow, or press the “RCA” button on the remote control.

Connecting a USB Drive

1. Connect the USB drive to the USB connector on the speakers.
2. Press the source selection button until the indicator lights up purple, or press the “USB” button on the remote control.
3. Control playback through the speakers.

Connecting Devices via Bluetooth

1. Press the “BT” button on the remote control, or press the source selection button on the speaker until the indicator flashes blue.
2. Enable Bluetooth on your source device.
3. Find and connect to the device “Fiero BHS-200”. On successful connection, the indicator will start flashing blue slowly.
4. Control playback from the source device.
5. If Bluetooth playback is interrupted, bring the source device closer or move other Bluetooth signal sources (wireless monitors, cameras, phones, etc.) farther away.

Troubleshooting Guide

The device does not turn on

- Make sure the device is properly connected to the power source.
- Make sure the outlet has power.
- Press the power button to turn on the device.
- Disconnect and reconnect the power adapter, then turn the device back on.

No sound

- Increase the volume. Press “Vol+” on the remote control or on the control panel.
- Press the “MUTE” button on the remote control to make sure the soundbar is not muted.
- Press the source selection button to choose a different input source.
- Make sure the audio source supports connection to the speakers.
- When using Bluetooth, make sure the volume on the source device is turned up and the device is not muted.

The remote control does not work

- Before pressing any playback control button, first select the correct source.
- Reduce the distance between the remote control and the device.
- Insert the batteries, observing polarity.
- Replace the batteries.
- Point the remote control directly at the sensor on the front panel of the device.

Cannot find the Bluetooth name of this device on my Bluetooth device

- Make sure Bluetooth is activated on your Bluetooth device.
- Reconnect the device to the Bluetooth device.

Rules and Conditions for Installation, Storage, Transportation, Sale (Distribution), and Disposal

- This device requires no assembly or mounting.
- The device must be stored in its original packaging, on heated premises, both at the manufacturer's and at the consumer's sites. The ambient temperature should be between +5 °C and +40 °C, and the relative humidity should not exceed 80% (non-condensing). The storage area must be free from aggressive contaminants (e.g., acid or alkali vapors) that could cause corrosion.
- The device must be transported in a dry place.
- The device requires careful handling. Protect it from exposure to dust, dirt, impact, moisture, fire, and other hazards.
- Sale or distribution of the device must be carried out in accordance with local legislation.
- Upon expiration of the device's service life, it must not be disposed of with unsorted household waste. Instead, it must be taken to an authorized collection point for electrical and electronic equipment for subsequent recycling and disposal in accordance with federal or local legislation. By ensuring proper disposal of this product, you help conserve natural resources and prevent potential harm to the environment and human health that may result from improper handling. For more detailed information about collection and disposal points for this product, please contact your local municipal authorities or your household waste disposal service.
- If a device malfunction is detected, immediately contact an authorized service center or dispose of the device.
- Upon expiration of the service life of batteries supplied with the device, do not dispose of them with other household waste. Batteries must be disposed of in accordance with local waste recycling regulations to prevent potential environmental harm resulting from uncontrolled waste disposal.

Warranty Information

The manufacturer guarantees the device will function properly throughout the warranty period and be free from defects in materials and assembly. The warranty period commences on the date of purchase and applies to new products only. Warranty service includes free repair or replacement of defective parts that fail during the warranty period, provided the failure is not caused by consumer misuse and the product is operated in accordance with the user manual. Repairs or part replacements shall be performed at authorized service centers.

Warranty Period: 12 months

Service Life: 24 months

For the up-to-date list of authorized service centers, please visit:

<https://www.dns-shop.ru/service-center/>

Additional Information

Manufacturer: Mybestsound Co.,Ltd.

301, Building A3, Haocheng (Heping) Industrial Park, No.66 Hexiu West Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, China.

Made in China.

The product meets the requirements of the technical regulations of the TR CU (EAEU).

Product specifications, information and appearance are subject to change without prior notice, for quality improvement of our products.



Production date (mm.yyyy): _____ v.1

Fiero