


FR03(24-LF)

Lithium Battery



Dimensions

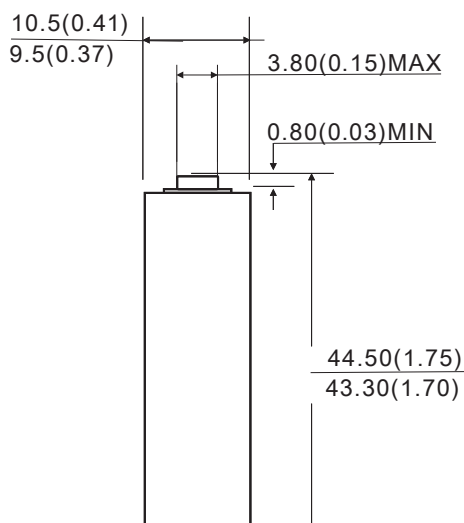

Unit:mm(inch)

Specifications

Chemical System:	Lithium Iron Disulfide(Li/FeS ₂)
IEC Name:	FR03
ANSI/NEDA:	24-LF(AAA)
Camelion Model:	FR03
Average Weight:	7.5g
Dimension(Ø x H):	10.0 ^{±0.5} x 43.9 ^{±0.6} mm
	0.39 ^{±0.02} x 1.73 ^{±0.02} inch
Terminals:	Flat
Nominal Voltage:	1.5Volts
Capacity:	1100mAh
	(Rated at 25mA to 0.8V)
Operating Temperature:	-40°C-60°C
Storage Temperature:	-40°C-60°C
Relative Humidity:	60±15%
Jacket :	Aluminum Foil Label

Usage Guide



Electronic games



Toy



Wireless mouse

Cautions

Storage

Store the battery in a cool, dry and well-ventilated area.

Handling

- 1) Do not charge. Do not heat or dispose of in fire or water. Do not modify or disassemble. Do not short-circuit.
- 2) Keep away from metal or other conductive materials.
- 3) Keep away from children. In case of ingestion, consult a doctor immediately.
- 4) When the battery is stored or disposed of, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touching each other.
- 5) In case the electrolyte(s) from the battery come in contact with your mouth, gargle well and consult a doctor immediately.


Notice:

Environmental elements comply with 2006/66/EC requirements. This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty. For additional information, please consult your nearest Camelion Sales Office or Distributor or visit our website at: www.camelionbattery.com.

FR03(24-LF)

Lithium Battery

Temperature Effects on Capacity Constant current discharge

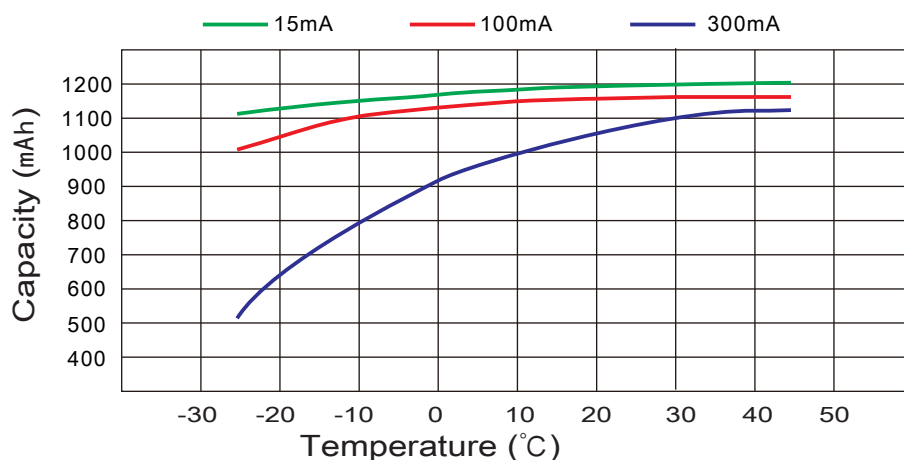

ANSI/IEC Standard Testing Typical Characteristics 21°C

