


LR6-Ultra

Ultra Alkaline Battery



Dimensions

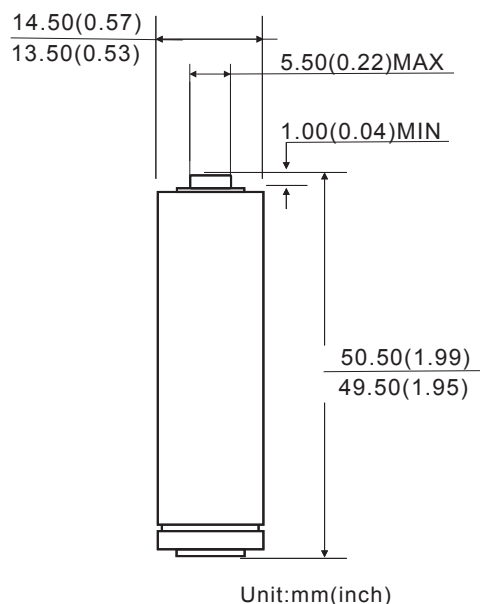

Specifications

Chemical System:	Alkaline (Zn/MnO ₂) Zinc-Manganese Dioxide
IEC Name:	LR6
ANSI/NEDA:	15A(AA)
Camelion Model:	LR6
Average Weight:	23.5g
Dimension(Ø x H):	14.0 $\pm$ 0.5x 50.0 $\pm$ 0.5 mm 0.56 $\pm$ 0.02 x 1.97 $\pm$ 0.02 inch
Terminals:	Flat
Nominal Voltage:	1.5Volts
Capacity:	2800mAh (Rated at 25mA to 0.8V)
Operating Temperature:	-18°C-55°C
Storage Temperature:	15°C-25°C
Relative Humidity:	60 $\pm$ 15%
Jacket :	Aluminum Foil Label
Available period:	10 years(Temperature: 20 $\pm$ 2°C, Relative Humidity: 60% $\pm$ 15%)

Usage Guide



Electronic games



Toy



Digital Still Camera

Cautions

Storage

Store the battery in a cool, dry and well-ventilated area.

Handling

- 1) Never charge the battery. Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals. Keep away from metal or other conductive materials.
- 2) Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.
- 3) When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.
- 4) In case the battery electrolyte happen to come into mouth, gargle well enough and consult a doctor immediately.

Notice:


Environmental elements comply with 2006/66/EC requirements. This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty. For additional information, please consult your nearest Camelion Sales Office or Distributor or visit our website at: www.camelionbattery.com.

LR6-Ultra

Ultra Alkaline Battery





Constant Current Discharge

Typical Characteristics at 21°C

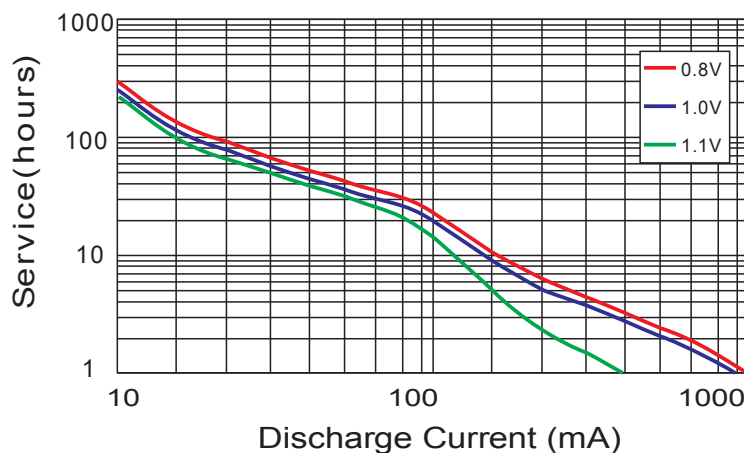

ANSI/IEC Standard Testing

Typical Characteristics 21°C

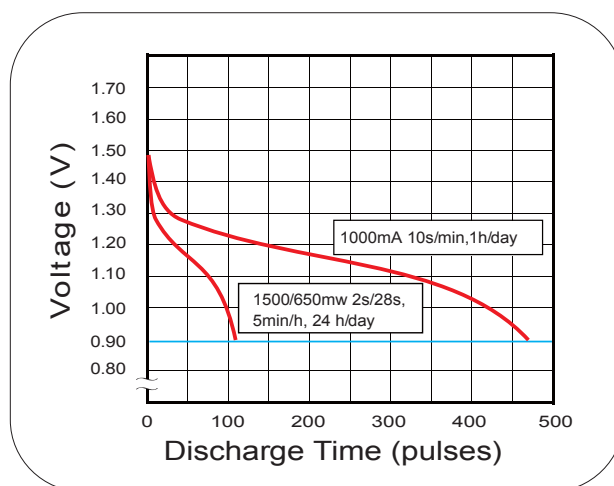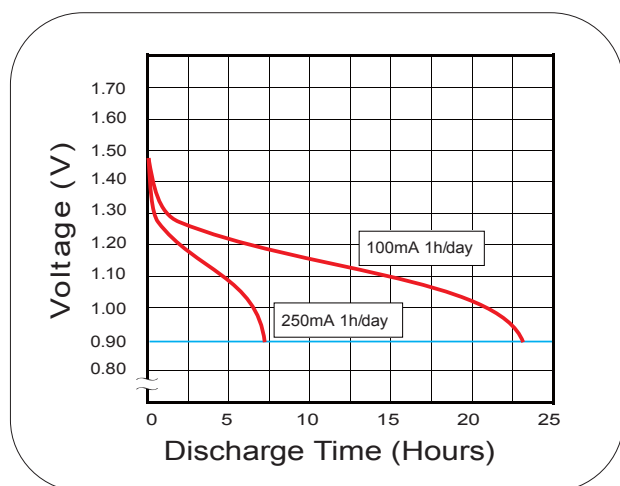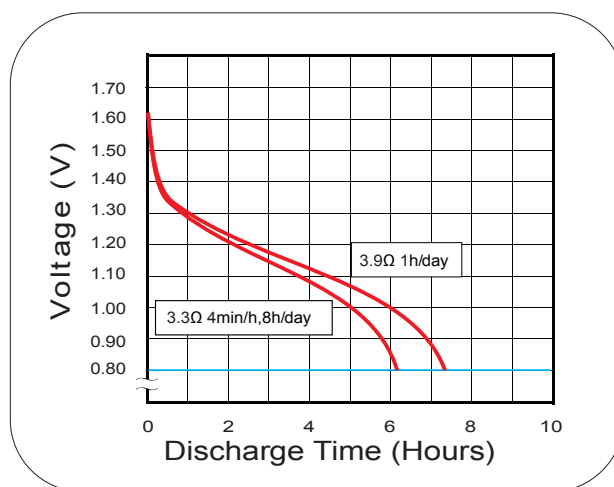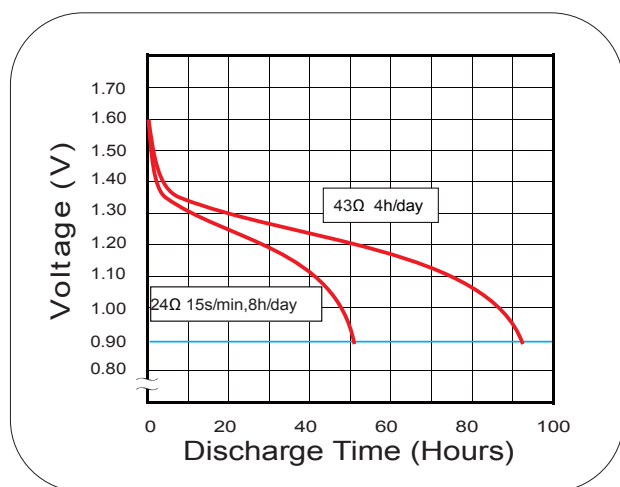

Notice:

Environmental elements comply with 2006/66/EC requirements. This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty. For additional information, please consult your nearest Camelion Sales Office or Distributor or visit our website at: www.camelionbattery.com.